We offer you more energy solutions

Camelion has provided energy solutions to customers worldwide for over 20 years.
Our mission is to satisfy our customers with qualified products, customer-friendly pricing and detailed services. We are dedicated to providing you and your family with all the energy solutions you need, don't hesitate to give us a try.

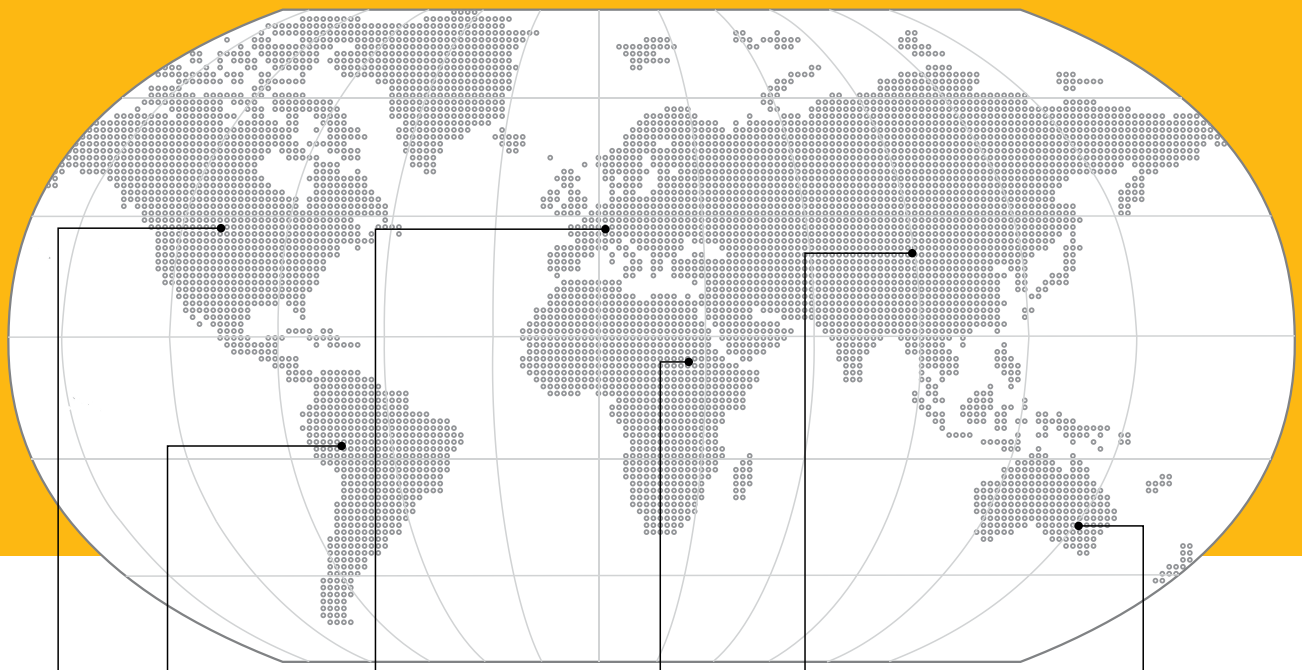

North America
- Canada
- Mexico
- U. S. A.

Caribbean/ Latin America
- Argentina
- Brazil
- Bolivia
- Chile
- Colombia
- Costa Rica
- Cuba
- Dominica
- Ecuador
- Salvador
- Guatemala
- Haiti
- Nicaragua
- Panama
- Paraguay
- Peru
- Puerto Rico
- Trinidad and Tobago
- Uruguay
- Venezuela

Europe
- Austria
- Andorra
- Albania
- Belgium
- Bulgaria
- Bosnien
- Croatia
- Cyprus
- Czech Republic
- Denmark
- Estonia
- Finland
- France
- Germany
- Greece
- Hungary
- Ireland
- Italy
- Iceland
- Liechtentein
- Luxembourg
- Lithuania
- Macedonia
- Montenegro
- Malta
- Netherlands
- Norway
- Portugal
- Poland
- Romania
- Russia
- Spain
- Slovenia
- Switzerland
- Serbia
- Sweden
- Slovakia
- Uk

Africa
- Algeria
- Benin
- Botswana
- Egypt
- Eritrea
- Gana
- Lybia
- Morocco
- Sierra Leone
- South Africa
- Tunisia
- Uganda

Asia
- Afghanistan
- Armenia
- Azerbaijan
- Bangladesh
- Cambodia
- China
- HK China
- Indonesia
- India
- Iraq
- Iran
- Israel
- Japan
- Jordan
- Kuwait
- Korea
- Kyrghyzstan
- Kazakhstan
- Lao
- Lebanon
- Malaysia
- Mongolia
- Nepal
- Pakistan
- Palestan
- Philippines
- Saudi Arabia
- Syria
- Singapore
- Sri Lanka
- Taiwan, China
- Thailand
- Turkmenistan
- Vietnam
- Yemen
- Tajikstan
- Uzbekstan
- U.A.E.

Oceania
- Australia
- Fiji
- New Zealand

CHINA

Camelion Battery Co., Ltd
Unit 705, Cyber Times Tower A,
Tianan Cyber Park, Shenzhen,
Guangdong 518041,
China

Camelion Enterprises Ltd.
Flat A, 8/F., MG Tower,
133 Hoi Bun Road, Kwun Tong, Kln.,
Hong Kong

NORTH AMERICA

Camelion North America Inc.
2572 Daniel-Johnson Blvd.
Suite 206-207
Laval, QC, H7T 2R3, Canada
www.camelionna.com

Camelion Holding Inc.
Batteries and Things Inc.
365 24th Street, LaSalle, IL 61301

LATIN AMERICA

Camelion Battery Co., Inc.
5000 SW 75th Avenue, Suit 236
Miami, Florida 33155

EUROPE

Camelion Batterien GmbH.
Bergiusstr. 53-59,D - 12057 Berlin,
Germany

For more information about Camelion, please visit www.camelionbattery.com

Camelion is a registered trademark of Camelion Battery Co., Ltd.
All other brand names are trademarks or registered trademarks of the respective companies.
Copyright ©2020 Camelion Battery Co., Ltd. All rights reserved.

www.camelionbattery.com

CA-FL-2020

Product Catalogue 2020

Portable Lighting

Camelion®

More Energy Solutions

www.camelionbattery.com

More Energy Solutions

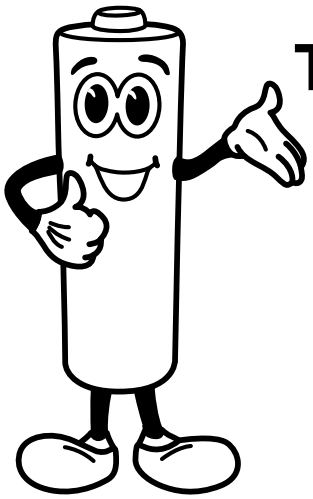

Try us out today!

- Flashlights
- Rechargeable Flashlights
- Search Lights
- Work Lights
- Specialty Lights
- Head Lights
- Waterproof Lighting
- Safety Lights

CONTENT

Flashlights

RT395, T13, T72 4
T73, T75, T76 5
HP7011, PT1L2D,PT1L2AA 6
FL1L2D, FL1L2C, FL1L2AA 7

Rechargeable Flashlights

RHP6041, RHP6062 8

Search Lights

S32, CM25L 9
FL-9LED, FL-16LED 10
S90, S160 11

Work Lights

S31, RS60 12
T11, SL5240N, SL7280N 13

Specialty Lights

S65, S28, S50 14
S61, DL2AAAS, DL2AAASL 15

Head Lights

S51, S58 16
RS71, S79 17

Waterproof Lighting

S67, S62 18

Safety Lights

S48, RS652 19
T16S, S53, S767 20

Packing Details

21

Flashlights



Rechargeable

RT395

Main Features

- Micro USB rechargeable
- HID like lens with adjustable focus
- Five lighting modes: 100% / 50% / 25% / Strobe / SOS
- High-quality aircraft aluminum construction
- Tactical head

Specifications

Power Source: 1 x 2000mAh, 18650 Li-ion battery
Input: 5V ⎓ 1A
Charge Time: 3H
Light Source: 1 x 10W T6 LED
Lighting Modes: 100% / 50% / 25% / Strobe / SOS
Lumen Output: 300LM max
Run Time: High: 4H
Dimensions: Φ34 x 139mm
Φ1.34 x 5.47 inches
Weight: 150g (battery included)
0.33lb
Ingress Protection: IP44

T13

Main Features

- High quality & ultra-bright XT-E LED
- Beam distance of up to 250 meters
- Rated IPX7: protection against temporary immersion in water.
- Five lighting modes including side floodlight.

Specifications

Power Source: 3 x AA size batteries
Light Source: 5W XT-E LED + 3W dual-color COB
Lighting Modes: Flashlight: High / Low
Floodlight: High / Low / Red Flashing
Lumen Output: Flashlight: High: 330LM
Floodlight: High: 170LM
Run Time: Flashlight: High: 3 hours (approx)
Floodlight: High: 5 hours (approx)
Dimensions: Φ42.5 x 172 mm
Φ1.67 x 6.77 inches
Weight: 118 ± 10g (without batteries)
0.26 ± 0.02lb





T72

Main Features

- HID like lens with adjustable focus
- 3 Lighting modes: High / Low / SOS
- High quality aircraft aluminum construction.
- Tactical head with metal clip and anti-slip rubber ring.
- Versatile power source: AAA batteries, 18650 Li-Ion batteries or 21700 Li-Ion batteries

Specifications

Power Source: 3 x AAA size batteries / 1 x 18650 Li-ion battery / 1 x 21700 Li-ion battery
Light Source: 1 x XPE LED
Lighting Modes: High / Low / Strobe
Lumen Output: High: 120LM / Low: 60LM
Run Time: High: 4H / Low: 8H
Dimensions: Φ35 x 142mm
Φ1.38 x 5.59 inches
Weight: 132g (without batteries)
0.29lb
Ingress Protection: IP44



T73

Main Features

- HID-like lens with adjustable focus
- Five lighting modes: 100% / 50% / 25% / Strobe / SOS
- High-quality aircraft aluminum construction
- Tactical head
- Versatile power source: AAA batteries, 18650 Li-ion battery or 21700 Li-ion battery

Specifications

Power Source: 3 x AAA size batteries
1 x 18650 Li-ion battery
1 x 21700 Li-ion battery
Light Source: 1 x XML-T6 LED
Lighting Modes: 100% / 50% / 25% / Strobe / SOS
Lumen Output: 300LM max
Run Time: High: 2-6 hrs
Beam Distance: 100 m
Dimensions: Φ41.5 x 150 mm
Φ1.63 x 5.91 inches
Weight: 150g (without batteries)
0.33lb
Ingress Protection: IP44



T75

Main Features

- HID-like lens with adjustable focus
- Five lighting modes: 100% / 50% / 25% / Strobe / SOS
- High-quality aircraft aluminum construction
- Tactical head

Specifications

Power Source: 2 x AA size batteries
Light Source: 1 x XML-T6 LED
Lighting Modes: 100% / 50% / 25% / Strobe / SOS
Lumen Output: 300LM max
Run Time: High: 2.5-6 hrs
Beam Distance: 100 m
Dimensions: Φ30 x 182 mm
Φ1.18 x 7.71 inches
Weight: 107g (without batteries)
0.24lb
Ingress Protection: IP44



T76

Main Features

- HID-like lens with adjustable focus
- Five lighting modes: 100% / 50% / 25% / Strobe / SOS
- High-quality aircraft aluminum construction
- Tactical head

Specifications

Power Source: 3 x D size batteries
Light Source: 1 x XML2 LED
Lighting Modes: 100% / 50% / 25% / Strobe / SOS
Lumen Output: 450LM max
Run Time: High: 10-22 hrs
Beam Distance: 100 m
Dimensions: Φ55 x 318 mm
Φ2.17 x 12.52 inches
Weight: 354g (without batteries)
0.78lb
Ingress Protection: IP44

HP7011

Main Features

- Durable TPE material
- Shock-resistant of up to 3 meters
- Compact and lightweight
- Weatherproof
- Lanyard included

Specifications

Power Source: 3 x AAA size batteries
Light Source: 1 x OSRAM DURIS S5 LED
Lighting Modes: On / Off
Lumen Output: 90 LM
Run Time: 8 hours (approx)
Dimensions: Φ36.5 x 105 mm
Φ1.44 x 4.13 inches
Weight: 54 ± 3g (without batteries)
0.12 ± 0.01lb

PT1L2D

Main Features

- Durable TPE material
- Shock-resistant of up to 1 meter
- Lanyard included
- IP Rating: IPX7

Specifications

Power Source: 2 x D size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Lumen Output: 45 LM
Run Time: 140 hours (approx)
Dimensions: Φ68 x 203 mm
Φ2.68 x 7.99 inches
Weight: 245 ± 5g (without batteries)
0.54 ± 0.01lb
Ingress Protection: IPX7
Available Colors: Red / Blue

PT1L2AA

Main Features

- Durable TPE material
- Shock-resistant of up to 2 meters
- Lanyard included
- IP Rating: IPX7

Specifications

Power Source: 2 x AA size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Lumen Output: 45 LM
Run Time: 20 hours (approx)
Dimensions: Φ48 x 150 mm
Φ1.89 x 5.91 inches
Weight: 185 ± 3g (without batteries)
0.41 ± 0.01lb
Ingress Protection: IPX7
Available Colors: Red / Blue

FL1L2D

Main Features

- 80% more energy efficient than traditional incandescent flashlights

Specifications

Power Source: 2 x D size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Lumen Output: 35 LM
Run Time: 200 hours (approx)
Dimensions: Φ60 x 191 mm
Φ2.36 x 7.52 inches
Weight: 100 ± 3g (without batteries)
0.22 ± 0.01lb
Available Colors: Red / Blue / Black / Yellow

FL1L2C

Main Features

- 80% more energy efficient than traditional incandescent flashlights

Specifications

Power Source: 2 x C size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Lumen Output: 35 LM
Run Time: 90 hours (approx)
Dimensions: Φ47 x 157 mm
Φ1.85 x 6.18 inches
Weight: 63 ± 3g (without batteries)
0.14 ± 0.01lb
Available Colors: Red / Blue / Black / Yellow

FL1L2AA

Main Features

- 80% more energy efficient than traditional incandescent flashlights

Specifications

Power Source: 2 x AA size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Lumen Output: 35 LM
Run Time: 35 hours (approx)
Dimensions: Φ36 x 146 mm
Φ1.42 x 5.75 inches
Weight: 41 ± 3g (without batteries)
0.09 ± 0.01lb
Available Colors: Red / Blue / Black / Yellow

Rechargeable Flashlights

RHP6041

Main Features

- Built-in retractable input plug for convenient charging
- 20-hour run time on a full charge
- Ergonomic lightweight design for comfort
- Durable rubber construction for impact absorption

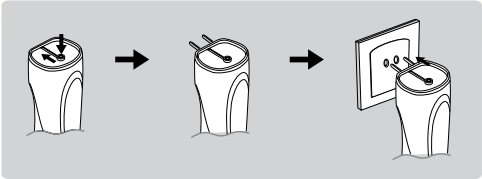

Specifications

Power Source: Sealed lead-acid, 4V, 400mAh
Charge Cycle: 500 times
Input: AC220V ~ 50Hz
Charge Time: 10 to 12 hours (approx)
Light Source: 4 x 3.2V cool white LED, 1850mcd
Lighting Modes: On / Off
Run Time: 20 hours (approx)
Dimensions: Φ55 x 154 mm
Φ2.17 x 6.06 inches
Weight: 160 ± 3g (without batteries)
0.35 ± 0.01lb
Available Colors: Yellow / Black

RHP6062

Main Features

- Built-in retractable input plug for convenient charging
- 24-hour run time on a full charge
- Two lighting modes

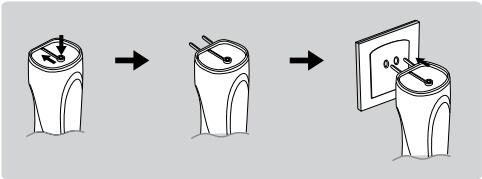

Specifications

Power Source: Sealed lead-acid, 4V, 400mAh
Charge Cycle: 500 times
Input: AC220V ~ 50Hz
Charge Time: 10 to 12 hours (approx)
Light Source: 6 x 3.2V cool white LED, 1850mcd
Lighting Modes: 3 LED / 6 LED
Run Time: 3 LED: 24 hours / 6 LED: 15 hours (approx)
Dimensions: Φ62 x 191 mm
Φ2.44 x 7.52 inches
Weight: 180 ± 3g (without batteries)
0.40 ± 0.01lb
Available Colors: Yellow+Black / Red+Black

Search Lights

S32

Main Features

- 2-in-1 Multi-function search light
- Five lighting modes including side panel
- Adjustable handle for ease of use in different position
- IPX4 Ingress protection

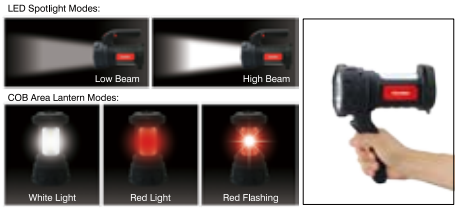

5 Lighting modes | 230 Lumens | 6 hrs Runtime | 200m

Specifications

Power Source: 3 x AA size batteries
Light Source: 3W White LED + 3W dual-color COB
Lighting Modes: LED: High / Low
COB: White / Red / Red Flashing
Lumen Output: LED: High: 230LM / Low: 160LM
COB: White 150LM
Run Time: LED: High: 4 hrs / Low: 6 hrs (approx)
COB: 6 hrs (approx)
Dimensions: 174 x 98 x 139 mm
6.85 x 3.86 x 5.47 inches
Weight: 325 ± 5g (without batteries)
0.72 ± 0.01lb
Ingress Protection: IPX4

CM25L

Main Features

- Three to eight times more energy efficient than regular incandescent search light

Specifications

Power Source: 1 x 4R25 size batteries
Light Source: 1 x OSRAM S5 LED
Lighting Modes: On / Off
Lumen Output: 90LM
Run Time: 70 hours (approx)
Dimensions: Φ126 x 188 mm
Φ4.96 x 7.40 inches
Weight: 255 ± 5g (without batteries)
0.72 ± 0.01lb

up to 70 hours continuous lighting

FL-9LED

9 LEDs

up to 150 hours continuous lighting

Main Features

- Outstanding lighting provided by 9 high bright LEDs
- Lightweight and compact
- Durable and comfortable ABS casing
- Beam distance up to 100 meters

Specifications

Power Source: 4 x AA size batteries
Light Source: 9 x 5mm LEDs
Lighting Modes: On / Off
Lumen Output: 54LM
Run Time: 150 hours (approx)
Dimensions: Φ100 x 148 mm
Φ3.94 x 5.83 inches
Weight: 220 ± 3g (without batteries)
0.49 ± 0.01lb

FL-16LED

16 LEDs

Up to 500 hours Continuous Lighting

Main Features

- Outstanding lighting provided by 16 high LEDs
- Beam distance up to 150 meters
- Compatible with D size batteries or Super Heavy Duty 6V batteries

Specifications

Power Source: 4 x D size batteries / Super Heavy Duty 6V batteries
Light Source: 16 x 5mm LEDs
Lighting Modes: On / Off
Lumen Output: 96LM
Run Time: 500 hours (approx)
Dimensions: Φ126 x 185 mm
Φ4.96 x 7.28 inches
Weight: 350 ± 3g (without batteries)
0.77 ± 0.01lb

S90

Main Features

- Light source provided by high bright LED and a COB flood light
- Beam distance up to 100 meters
- Lightweight and compact
- Durable and comfortable ABS casing
- IP Rating: IPX4

Specifications

Power Source: 4 x AA size batteries
Light Source: 0.5W LED + 3W COB
Lighting Modes: LED / COB / LED+COB
Lumen Output: LED: 90LM / COB: 150LM / LED+COB: 220LM
Run Time: LED: 24hrs / COB: 24hrs / LED+COB: 6hrs (approx)
Dimensions: 148 x 101 x 133 mm
5.83 x 3.98 x 5.24 inches
Weight: 205 ± 5g (without batteries)
0.45 ± 0.01lb
Ingress Protection: IPX4

S160

Main Features

- Light source provided by high bright LED and a COB flood light
- Beam distance up to 100 meters
- Lightweight and compact
- Durable and comfortable ABS casing
- IP Rating: IPX4

Specifications

Power Source: 1pcs x 4R25 size batteries
Light Source: 1W LED + 3W COB
Lighting Modes: LED / COB / LED+COB
Lumen Output: LED: 150LM / COB: 200LM / LED+COB: 280LM
Run Time: LED: 125hrs / COB: 80hrs / LED+COB: 30hrs (approx)
Dimensions: 184 x 130 x 135 mm
7.24 x 5.11 x 5.31 inches
Weight: 305 ± 5g (without batteries)
0.45 ± 0.01lb
Ingress Protection: IPX4
All data base on using 4D alkaline batteries.

Work Lights

S31

Main Features

- Powerful 3W COB LED lighting
- 360° rotatable stand for different lighting directions
- Strong magnet

Specifications

Power Source: 4 x AAA size batteries
Light Source: 1 x 3W COB
Lighting Modes: On / Off
Lumen Output: 200LM
Run Time: 3 hours (approx)
Dimensions: 91 x 35 x 100 mm
3.58 x 1.38 x 5.04 inches
Weight: 100 ± 3g (without batteries)
0.22 ± 0.01lb

3 Lighting Modes

Adjustable brightness

Rechargeable with Micro USB

Magnet Mount or Hang with swivel hook

RS60

Main Features

- Slim and durable design
- 3 lighting modes: White, Red, Red Flashing
- Adjustable brightness with easy-to-use rotary switch
- Adjustable swivel base with magnet
- Integrated swivel hook
- Micro USB rechargeable

Specifications

Power Source: 1 x 3.7V, 1800mAh, 18650 Li-ion batteries
Input: 5V⎓1A
Charge Time: 3 hours (approx)
Light Source: 5W COB
Lighting Modes: White / Red / Red Flashing
Lumen Output: 300LM (Max)
Run Time: 2 to 8 hours (approx)
Dimensions: 375 x 36 x 32.5 mm
14.76 x 1.42 x 1.28 inches
Weight: 155 ± 3g (without batteries)
0.34 ± 0.01lb

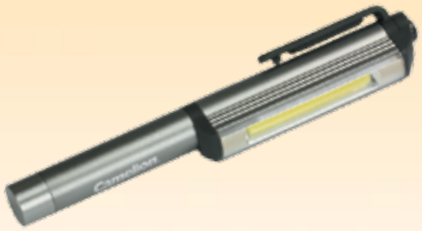

T11

Main Features

- Powerful 3W COB lighting
- Durable CNC-machined aluminum alloy body
- Rotatable magnetic clip
- Compact and lightweight

Specifications

Power Source: 3 x AAA size batteries
Light Source: 1 x 3W COB
Lighting Modes: On / Off
Lumen Output: 200LM
Run Time: 2.5 hours (approx)
Dimensions: 163 x 30 x 16 mm
6.42 x 1.18 x 0.63 inches
Weight: 62 ± 3g (without batteries)
0.14 ± 0.01lb

SL5240N

Main Features

- Powerful 3W COB LED lighting
- Strong magnet button and 360 degrees swivel hook
- Durable and comfortable ABS casing

Specifications

Power Source: 3 x AA size batteries
Light Source: 1 x 3W COB
Lighting Modes: On / Off
Lumen Output: 220LM
Run Time: 4 hours (approx)
Dimensions: 208 x 59 x 31 mm
8.19 x 2.32 x 1.22 inches
Weight: 110 ± 3g (without batteries)
0.24 ± 0.01lb

SL7280N

Main Features

- Powerful 3W COB LED lighting
- 4-LED flashlight
- Strong magnet and 360 degrees swivel hook
- Durable and comfortable rubberized ABS casing

Specifications

Power Source: 3 x AAA size batteries
Light Source: 1 x 3W COB + 4 x LEDs
Lighting Modes: COB: On / OFF , Flashlight: On / Off
Lumen Output: COB: 200LM
Run Time: 2.5 hours (approx)
Dimensions: 95 x 59 x 40 mm
3.74 x 2.32 x 1.57 inches
Weight: 65 ± 3g (without batteries)
0.14 ± 0.01lb

Specialty Lights

S65

Main Features

- Adjustable brightness with rotary dial
- Easy mount with variations of nail hole, velcro or magnet
- Great lighting provided by 2 x 3W COB LEDs

Specifications

Power Source: 4 x AAA size batteries
Light Source: 2 x 3W COB LEDs
Lighting Modes: On / Off (adjustable brightness with rotary dial)
Lumen Output: 250LM
Run Time: Brightest: 3 hours
Dimensions: 114 x 76 x 31 mm
4.49 x 2.99 x 1.22 inches
Weight: 72 ± 3g (without batteries)
0.16 ± 0.01lb

S28

Main Features

- Powerful lighting provided with two 3W COB LEDs
- Easy mount with variations of nail hole, velcro, or magnet
- Easy-to-use flip switch

Specifications

Power Source: 4 x AAA size batteries
Light Source: 2 x 3W COB LEDs
Light Modes: On / Off
Lumen Output: up to 250LM
Run time: up to 3 hours
Dimensions: 144 x 76 x 35 mm
4.49 x 2.99 x 1.38 inches
Weight: 79 ± 3g (without batteries)
0.17 ± 0.01lb



S50

Main Features

- Durable and long-lasting COB LED
- Motion sensor detection up to 4 meters
- Easy mount with magnetic plate or foldable hook

Specifications

Power Source: 3 x AAA size batteries
Light Source: 1 x 3W COB
Lighting Modes: On / Off
Lumen Output: 150LM
Motion Sensor Distance: 4 meters
Sensor Angle: 120°
Dimensions: 80 x 80 x 27 mm
3.15 x 3.15 x 1.06 inches
Weight: 62 ± 3g (without batteries)
0.14 ± 0.01lb

S61

Main Features

- Compact and lightweight
- Equipped with magnet and carabiner
- Three lighting modes

Specifications

Power Source: 2 x CR2032 lithium button cells
Light Source: 1 x 1W COB
Lighting Modes: High / Low / Strobe
Lumen Output: 30LM
Run Time: 2.5 hours (approx)
Dimensions: 73 x 34 x 23.5 mm
2.87 x 1.34 x 0.93 inches
Weight: 26 ± 5g (without batteries)
0.06 ± 0.01lb

DL2AAAS

Main Features

- Durable CNC-machined aluminum alloy body
- Pen size with clip
- Miniature incandescent bulb - safe for inspecting eyes and ears

Specifications

Power Source: 2 x AAA size batteries
Light Source: 1 x 2.2V, 250mA miniature incandescent bulb
Lighting Modes: On / Off
Lumen Output: 5LM
Run time: 2.5 hours (approx)
Dimensions: Φ13 x 138 mm
Φ0.51 x 5.43 inches
Weight: 15 ± 2g (without batteries)
0.03 ± 0.004lb

DL2AAASL

Main Features

- Durable CNC-machined aluminum alloy body
- Pen size with clip
- LED Light Bulb

Specifications

Power Source: 2 x AAA size batteries
Light Source: 1 x 0.2W LED
Lighting Modes: On / Off
Lumen Output: 5LM
Run time: 2.5 hours (approx)
Dimensions: Φ13 x 138 mm
Φ0.51 x 5.43 inches
Weight: 15 ± 2g (without batteries)
0.03 ± 0.004lb

Head Lights

S51

Main Features

- Super Bright XP-G 5W LED
- Touch-activated switch
- Four lighting modes
- Adjustable light angle

Specifications

Power Source: 3 x AAA size batteries
Light Source: 1 x XP-G 5W LED + 2 x 3W COB LEDs
Lighting Modes: High / Low / COB White / COB Red Flashing
Lumen Output: High: 200LM / Low: 100LM / COB White: 100LM
Run time: High: 2.5 hours / Low: 5 hours /
COB White: 3.5 hours (approx)
Dimensions: 60 x 40 x 45 mm
2.36 x 1.57 x 1.77 inches
Weight: 55 ± 2g (without batteries)
0.12 ± 0.004lb

S58

Main Features

- Super bright COB lighting
- Easy-to-use switch
- Three lighting modes
- Adjustable light angle

Specifications

Power Source: 3 x AAA size batteries
Light Source: 1 x 3W COB LED
Lighting Modes: High / Low / Strobe
Lumen Output: High: 120LM / Low: 30LM
Run time: High: 2 hours / Low: 8 hours (approx)
Dimensions: 60 x 45 x 35 mm
2.36 x 1.77 x 1.38 inches
Weight: 15 ± 3g (without batteries)
0.09 ± 0.01lb

RS71

Main Features

- Easy-to-use touch switch and wave sensor switch
- High bright 80LM LED
- Adjustable light angle
- USB rechargeable

Specifications

Power Source: 1 x 600mAh Li-polymer batteries
Light Source: 1 x XPE white LED + 2 x Red LEDs
Lighting Modes: White / Red
Lumen Output: White: 80LM / Red: 10LM
Run time: 2 hours (approx)
Dimensions: 60 x 45 x 34 mm
2.36 x 1.77 x 1.34 inches
Weight: 57 ± 5g (without batteries)
0.13 ± 0.01lb
Ingress Protection: IP44

S79

Main Features

- High bright XBD 3W LED
- Dual switch
- Four lighting modes
- Adjustable light angle

Specifications

Power Source: 2 x AAA size batteries
Light Source: 1PC CREE XBD LED+2PCS COB LED
Lighting Modes: CREE LED: White LED high-low-off
COB LED: White COB on-red COB strobe-off
Lumen Output: White: 100LM / red: 10LM
Run time: White: 2 hours /red: 18 hours (approx)
Dimensions: 64 x 37 x 33.5 mm
2.52 x 1.46 x 1.33 inches
Weight: 47 ± 5g (without batteries)
0.28 ± 0.02lb

Waterproof Lighting

S67

Main Features

- IP68 Waterproof rating
- Three lighting modes (High / Low / Strobe)
- Super bright 3W LED
- Adjustable light angle up to 90 degrees

IP68 Waterproof | 150 Lumens | 3 Lighting modes

Specifications

Power Source: 3 x AAA size batteries or 1 x 18650 Li-ion Batteries
Light Source: 1 x 3W LED
Lighting Modes: High / Low / strobe
Lumen Output: High: 150LM / Low: 50LM
Run time: High: 3 hours / Low: 8 hours (approx)
Dimensions: 102 x 85 x 40 mm
4.02 x 3.35 x 1.57 inches
Weight: 135 ± 5g (without batteries)
0.30 ± 0.01lb
Ingress Protection: IP68
Diving Depth: up to 3 meters

S62

Main Features

- IP68 rating
- Reaches depths of 10 meters under water
- 3W super bright LED
- Magnetic rotary switch
- Durable ABS body

IP68 Waterproof | 10 Meter depths | 3W High power LED | 3 Lighting modes

Specifications

Power Source: 3 x AA size batteries
Light Source: 1 x 3W LED
Lighting Modes: High / Low / Strobe
Lumen Output: 180LM
Run time: 5 hours (approx)
Dimensions: Φ48 x 125 mm
Φ1.89 x 4.92 inches
Weight: 98 ± 5g (without batteries)
0.22 ± 0.01lb

Safety Lights

Bicycle Light | 40 Lumens | 6 Lighting modes | USB rechargeable

S48

Main Features

- Durable and long-lasting COB
- Six lighting modes
- Adjustable light angle
- Silicon strap for easy mounting
- USB rechargeable

Specifications

Power Source: 3.7V, 300mAh, Li-polymer batteries
Input: DC5V = 300mA
Charge Time: 1.5 hours (approx)
Light Source: 1.2W COB
Lighting Modes: Low / Medium / High / Slow Flashing / Quick Flashing / Strobe
Lumen Output: 40LM (Max)
Run Time: 1 hours (approx)
Dimensions: 68 x 25 x 17 mm
2.68 x 0.98 x 0.67 inches
Weight: 28 ± 10g (without batteries)
0.06 ± 0.02lb

Bicycle Light | 3 Lighting modes | USB rechargeable

RS652

Main Features

- Silicon strap for easy mounting
- Three lighting modes
- USB rechargeable

Specifications

Power Source: 3.7V, 190mAh, Li-polymer batteries
Input: DC5V = 300mA
Charge Time: 1.5 hours (approx)
Light Source: 4 x 5mm LEDs
Lighting Modes: High / Low / Strobe
Run Time: High: 3 hours / Low: 8 hours / Strobe: 6 hours (approx)
Dimensions: 120 x 37 x 23 mm
4.72 x 1.46 x 0.91 inches
Weight: 22 ± 2g (without batteries)
0.05 ± 0.004lb

T16S

Main Features

- Super-bright XBD LED
- Silicon strap for easy mounting
- 3 lighting modes
- Durable aluminum alloy body

Specifications

Power Source: 3 x AAA size batteries
Light Source: 3W XBD LED
Lighting Modes: High / Low / Strobe
Lumen Output: 160LM
Run Time: 3.5 hours (approx)
Dimensions: Φ29 x 96 mm
Φ1.14 x 3.78 inches
Weight: 65 ± 5g (without batteries)
0.14 ± 0.01lb



S53

Main Features

- High bright LED
- Silicon strap for easy mounting
- Two lighting modes
- Magnetic switch

Specifications

Power Source: 2 x CR2032 3V lithium button cells
Light Source: 2 x 0.5W 2835 LED
Lighting Modes: On / Strobe
Light Color Available: White / Red
Lumen Output: White: 20LM / Red: 15LM
Run Time: White: 34 hours / Red: 9 hours (approx)
Dimensions: 47.5 x 25.5 x 22.7 mm
1.87 x 1.00 x 0.89 inches
Weight: 34 ± 5g (without batteries)
0.07 ± 0.01lb

S767

Main Features

- Long-lasting LED
- Three lighting modes
- Silicon strap for easy mounting
- Long run time

Specifications

Power Source: 3 x CR2032 lithium button cells
Light Source: 1 x 5mm LED
Lighting Modes: On / Fast Strobe / Slow Strobe
Lumen Output: 43LM
Run Time: 50 hours (approx)
Dimensions: 110 x 27 x 35 mm
4.33 x 1.06 x 1.38 inches
Weight: 30 ± 2g (without batteries)
0.07 ± 0.004lb

Model#	Item#	Packaging Details								
		Packaging Type	Batteries Included	Blister/Display Details		Outer Carton Details				
				Dimensions (mm)	Net Weight (g)	Packs/ Carton	Dimensions (cm)	Volume (M^3)	Gross Weight (Kg)	Net Weight (kg)
				L × W × D			L × W × H			
T13	T13-3LR6TB	Blister Pack	3LR6	145 × 255 × 45	208	48	61 × 48 × 27.5	0.0806	10.38	9.98
HP7011	HP7011-BP	Blister Pack	/	110 × 190 × 40	74	48	46.5 × 41.5 × 21.5	0.0415	4.8	3.7
	HP7011-3R03BP	Blister Pack	3R03P	110 × 190 × 40	96.5	48	51.5 × 21.5 × 26.5	0.0294	6.4	4.7
	HP7011-3R03PD24	Display Box	3R03P	318 × 216 × 115	2036	4	46 × 34 × 25	0.0391	9.3	8.2
	HP7011D24	Display Box	/	318 × 216 × 115	1496	4	46 × 34 × 25	0.0391	7.1	6
PT1L2D	PT1L2DBP	Blister Pack	/	305 × 175 × 70	279	24	50.5 × 45 × 33	0.075	7.7	6.7
	PT1L2D-2R20PBP	Blister Pack	2R20P	305 × 175 × 70	446	24	50.5 × 45 × 33	0.075	11.7	10.7
PT1L2AA	PT1L2AABP	Blister Pack	/	248 × 120 × 50	131	48	49.5 × 36 × 33	0.0588	7.3	6.3
	PT1L2AA-2R6PBP	Blister Pack	2R6P	248 × 120 × 50	161	48	49.5 × 36 × 33	0.0588	8.7	7.7
FL1L2D	FL1L2DR20P	Blister Pack	2R20P	158 × 292 × 64	313	24	46 × 31.5 × 31	0.0449	8.7	7.5
	FL1L2DD12	Display Box	/	250× 188 × 195	1332	4	51.5 × 40 × 21.5	0.0443	6.75	5.3
FL1L2C	FL1L2C2R14P	Blister Pack	2R14P	131 × 24 × 50	170	24	47 × 26 × 20	0.0224	5	4
FL1L2AA	FL1L2AA2R6P	Blister Pack	2R6P	99 × 211 × 38	88	60	40 × 30 × 23	0.0276	5.7	5.3
	FL1L2AAD24	Display Box	/	230 × 154 × 150	1116	8	48 × 33 × 32.5	0.0515	9.29	8.2
RHP6041	RHP6041BP	Blister Pack	Lead Acid	103 × 240 × 57	170	48	54.5 × 50.5 × 26	0.0716	9.87	8.1
RHP6062	RHP6062BP	Blister Pack	Lead Acid	110 × 285 × 63	198	48	56.5 × 56 × 31.5	0.0997	10.9	9.5
S32	S32-3R6PCB	Box	3R6P	185 × 105 × 148	390	6	39 × 33.5 × 17	0.0222	3.15	2.35
CM25L	CM25L-4R25	Shrink Pack	4R25	256 × 117 × 115	985	6	53 × 37 × 13.5	0.0265	6.71	5.91
FL-9LED	FL-9LED-4R6P	Shrink Pack	4R6P	100 × 146 × 110	278	36	59 × 54 × 24	0.0765	13.53	13
FL-16LED	FL-16LED-4R20P	Shrink Pack	4R20P	250 × 120 × 132	695	12	51 × 37 × 28	0.0528	8.9	8.3
	FL-16LED-4R20PCB	Box	4R20P	250×123×135	708	12	52 × 39 × 30	0.0609	10.6	9.6
S31	S31-4LR03D12	Display Box	4R03P	320 × 170 × 132	2046	48	36 × 34 × 29	0.0355	8.58	8.18
RS60	RS60-CB	Box	Li-ion 18650	380 × 45 × 40	230	24	39.5 × 28.5 × 18	0.0203	5.9	5.52
T11	T11-3R03PD12	Display Box	3R03P	106 × 141 × 165	1321	48	31 × 24.4 × 1 8.7	0.0142	4.32	4
SL5240N	SL5240N-BP	Blister Pack	/	125 × 295 × 32	182	24	40.5 × 27.5 × 32	0.0357	4.67	4.37
	SL5240N-3R6PD12	Display Box	3R6P	202 × 227 × 210	1875	4	41 × 25 × 44	0.0451	8.5	7.5
SL7280N	SL7280N-BP	Blister Pack	/	125 × 202 × 40	94	48	58 × 36.5 × 22.5	0.0477	5.5	4.5
	SL7280N-3R03PD12	Display Box	3R03P	158 × 305 × 96	1050	4	32.5 × 32 × 21.5	0.0224	5	4.2
S65	S65-4R03PD12	Display Box	4R03P	280 × 195 × 118	1785	4	40.5 × 29.5 × 25.6	0.0306	6.5	5
S28	S28-4R03PD12	Display Box	4R03P	280 × 195 × 118	1250	4	40.5 × 29.5 × 25.6	0.0306	6.5	5
S50	S50-3R03P	Blister Pack	3R03P	286 × 156 × 85	82	48	33 × 30.2 × 19	0.0190	5.14	3.94
S61	S61-2CR2032	Fish Bowl	2CR2032	138 × 143 × 168	850	12	44 × 31.5 × 37.2	0.0516	11.1	10.08
DL2AAAS	DL2AAAS	Blister Pack	2R03P	206 × 101 × 20.4	56	100	48.5 × 39 × 25	0.0473	6.72	5.6
DL2AAASL	DL2AAASL	Blister Pack	2R03P	206 × 101 × 20.4	56	100	48.5 × 39 × 25	0.0473	6.72	5.6
S51	S51-3LR03DB	Blister Pack	3LR03	128 × 178 × 83	111.5	48	55 × 45.5 × 35	0.0876	6.3	5.35
S58	S58-3LR03DB	Blister Pack	3LR03	128 × 178 × 67	99.5	48	55 × 43.5 × 30.5	0.073	5.7	4.78
RS71	RS71-BP	Blister Pack	Li-polymer	128 × 178 × 67	113.5	48	55 × 43.5 × 30.5	0.073	6.37	5.45
S67	S67-BP	Blister Pack	/	128 × 188 × 54	168	48	52.5 × 43 × 30	0.0677	9.1	8.06
S62	S62-BP	Blister Pack	/	110 × 210 × 56	120	48	50.5 × 42 × 38.5	0.0817	6.8	5.76
S48	S48-BP1	Blister Pack	Li-polymer	111 × 172 × 30	52	48	38.5 × 37.5 × 27	0.0390	3.4	2.5
RS652	RS652-BP1	Blister Pack	Li-polymer	111 × 172 × 27	34	48	42 × 35.5 × 20	0.0299	2.6	1.6
T16S	T16S-3LRO3BP	Blister Pack	3LR03	110 × 205 × 31	123	48	50.5 × 30.5 × 25	0.0385	6.2	5.9
S53	S53-2CR2032BP	Blister Pack	2CR2032	111 × 172 × 48	85	48	37.5 × 34.5 × 27	0.0349	5	4.1
S767	S767-2CR2032BP1	Blister Pack	2CR2032	111 × 172 × 42	28	48	56 × 29.5 × 20	0.0331	2.4	1.4

Model#	Item#	Packaging Details								
		Packaging Type	Batteries Included	Blister/Display Details		Outer Carton Details				
				Dimensions (in) L × W × D	Net Weight (lb)	Packs/ Carton	Dimensions (in) L × W × H	Volume (ft³)	Gross Weight (lb)	Net Weight (lb)
T13	T13-3LR6TB	Blister Pack	3LR6	5.71 × 10.04 × 1.77	0.46	48	24.02 × 18.9 × 10.83	0.0023	22.89	22.01
HP7011	HP7011-BP	Blister Pack	/	4.33 × 7.48 × 1.57	0.16	48	18.11 × 16.34 × 8.46	0.0012	4.8	8.16
	HP7011-3R03BP	Blister Pack	3R03P	4.33 × 7.48 × 1.57	4.49	48	20.28 × 8.46 × 10.43	0.0008	10.58	10.36
	HP7011-3R03PD24	Display Box	3R03P	12.52 × 8.5 × 4.53	4.49	4	18.11 × 13.39 × 9.84	0.0011	20.51	18.08
	HP7011D24	Display Box	/	12.52 × 8.5 × 4.53	3.3	4	18.11 × 13.39 × 9.84	0.0011	15.66	13.23
PT1L2D	PT1L2DBP	Blister Pack	/	12.01 × 6.89 × 2.76	0.62	24	19.88 × 17.72 × 12.99	0.0021	16.98	14.77
	PT1L2D-2R20PBP	Blister Pack	2R20P	12.01 × 6.89 × 2.76	0.98	24	19.88 × 17.72 × 12.99	0.0021	25.8	23.59
PT1L2AA	PT1L2AABP	Blister Pack	/	9.76 × 4.72 × 1.97	0.29	48	19.49 × 17.72 × 12.99	0.0017	16.1	13.89
	PT1L2AA-2R6PBP	Blister Pack	2R6P	9.76 × 4.72 × 1.97	0.36	48	19.49 × 17.72 × 12.99	0.0017	19.18	16.98
FL1L2D	FL1L2DR20P	Blister Pack	2R20P	6.22 × 11.5 × 2.52	0.69	24	18.11 × 12.4 × 12.2	0.0013	19.18	16.54
	FL1L2DD12	Display Box	/	9.84× 7.4 × 7.68	2.94	4	20.28 × 15.75 × 8.46	0.0013	14.88	11.69
FL1L2C	FL1L2C2R14P	Blister Pack	2R14P	5.16 × 0.94 × 1.97	0.37	24	18.5 × 10.24 × 7.87	0.0006	11.03	8.82
FL1L2AA	FL1L2AA2R6P	Blister Pack	2R6P	3.9 × 8.31 × 14.96	0.19	60	15.75 × 11.81 × 9.06	0.0008	12.57	11.69
	FL1L2AAD24	Display Box	/	9.06 × 6.06 × 5.91	2.46	8	18.9 × 12.99 × 12.8	0.0015	20.48	18.08
RHP6041	RHP6041BP	Blister Pack	Lead Acid	4.06 × 9.45 × 2.24	0.37	48	21.46 × 22.05 × 12.4	0.0020	21.76	17.86
RHP6062	RHP6062BP	Blister Pack	Lead Acid	4.33 × 11.22 × 2.48	0.44	48	22.24 × 22.05 × 12.4	0.0028	24.03	20.95
S32	S32-3R6PCB	Box	3R6P	7.28 × 4.13 × 5.83	0.86	6	15.35 × 13.19 × 6.69	0.0006	6.95	5.18
CM25L	CM25L-4R25	Shrink Pack	4R25	10.08 × 4.61 × 4.53	2.17	6	20.87 × 14.57 × 5.31	0.0008	14.8	13.03
FL-9LED	FL-9LED-4R6P	Shrink Pack	4R6P	3.94 × 5.75 × 4.33	0.61	36	23.23 × 21.26 × 9.45	0.0022	29.44	28.67
FL-16LED	FL-16LED-4R20P	Shrink Pack	4R20P	9.84 × 4.72 × 5.2	1.53	12	20.08 × 14.57 × 11.02	0.0015	19.62	18.3
	FL-16LED-4R20PCB	Box	4R20P	9.84 ×4.84 ×5.31	1.56	12	20.47 × 15.35 × 11.81	0.0017	23.37	21.17
S31	S31-4LR03D12	Display Box	4R03P	12.6 × 6.69 × 5.2	4.51	48	14.17 × 13.39 × 11.42	0.0010	18.92	18.04
RS60	RS60-CB	Box	Li-ion 18650	14.96 × 1.77 × 1.57	0.51	24	15.55 × 11.22 × 7.09	0.0006	13.01	12.17
T11	T11-3R03PD12	Display Box	3R03P	4.17 × 5.55 × 6.5	2.91	48	12.2 × 9.61× 7.36	0.0004	9.53	8.82
SL5240N	SL5240N-BP	Blister Pack	/	4.92 × 11.61 × 1.26	0.4	24	15.94 × 10.83 × 12.6	0.0010	40.3	9.64
	SL5240N-3R6PD12	Display Box	3R6P	7.95 × 8.94 ×8.27	4.13	4	16.14 × 9.84 × 17.32	0.0013	18.74	16.54
SL7280N	SL7280N-BP	Blister Pack	/	4.92 × 7.95 × 1.57	0.21	48	22.83 × 14.37 × 8.86	0.0014	12.13	9.92
	SL7280N-3R03PD12	Display Box	3R03P	6.22 × 12.01 × 3.78	2.32	4	12.8 × 12.6 × 8.27	0.0006	11.03	9.26
S65	S65-4R03PD12	Display Box	4R03P	11.02 × 7.68 × 4.65	3.94	4	15.94 × 11.61 × 10.08	0.0009	14.33	11.03
S28	S28-4R03PD12	Display Box	4R03P	11.02 × 7.68 × 4.65	2.76	4	15.94 × 11.61 × 10.08	0.0009	14.33	11.03
S50	S50-3R03P	Blister Pack	3R03P	11.26 × 6.14 × 3.35	82	48	12.99 × 11.89 × 7.48	0.0005	11.33	8.69
S61	S61-2CR2032	Fish Bowl	2CR2032	5.43 × 5.63× 6.61	1.87	12	17.32 × 12.4 × 14.65	0.0015	24.48	22.23
DL2AAAS	DL2AAAS	Blister Pack	2R03P	8.11 × 3.98 × 0.8	56	100	19.09 × 15.35 × 9.84	0.0013	14.82	12.35
DL2AAASL	DL2AAASL	Blister Pack	2R03P	8.11 × 3.98 × 0.8	0.12	100	19.09 × 15.35 × 9.84	0.0013	14.82	12.35
S51	S51-3LR03DB	Blister Pack	3LR03	5.04 × 7.01 × 3.27	0.25	48	21.65 × 17.91 × 13.78	0.0025	13.89	11.8
S58	S58-3LR03DB	Blister Pack	3LR03	5.04 × 7.01 × 2.64	0.22	48	21.65 × 17.13 × 12.01	0.0021	12.57	10.54
RS71	RS71-BP	Blister Pack	Li-polymer	5.04 × 7.01 × 2.64	0.25	48	21.65 × 17.13 × 12.01	0.0021	14.05	12.02
S67	S67-BP	Blister Pack	/	5.04 × 7.4 × 2.13	0.37	48	20.67 × 16.93 × 11.81	0.0019	20.07	17.77
S62	S62-BP	Blister Pack	/	4.33 × 8.27 × 2.13	0.26	48	19.8 × 16.54 × 15.16	0.0023	14.99	12.7
S48	S48-BP1	Blister Pack	Li-polymer	4.37 × 6.77 × 1.18	0.11	48	15.16 × 14.76 × 10.63	0.0011	7.5	5.51
RS652	RS652-BP1	Blister Pack	Li-polymer	4.37 × 6.77 × 1.06	34	48	16.54 × 13.98 × 7.87	0.0008	5.73	3.53
T16S	T16S-3LRO3BP	Blister Pack	3LR03	4.33 × 8.07 × 1.22	0.07	48	19.88 × 12.01 × 9.84	0.0011	13.67	13.01
S53	S53-2CR2032BP	Blister Pack	2CR2032	4.37 × 6.77 × 1.89	0.19	48	14.76 × 13.58 × 10.63	0.0010	11.03	9.04
S767	S767-2CR2032BP1	Blister Pack	2CR2032	4.37 × 6.77 × 1.65	0.06	48	22.05 × 11.61 × 7.87	0.0009	5.29	3.09