

Camelion®

Portable Lighting

Torch
Search Light
Work Light
Lantern
Specialty Light




Product Catalogue

www.camelionbattery.com



More Energy Solutions

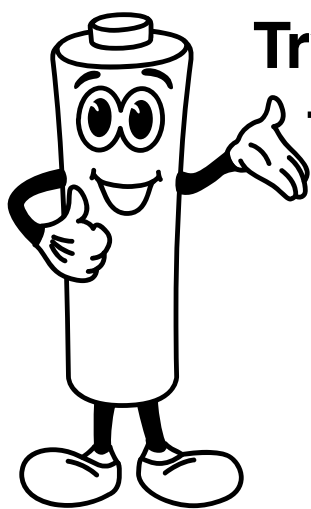

**Try us out
today!**

- Torch
- Search Light
- Work Light
- Lantern
- Camping Light
- Head Light
- Specialty Light

Content

Torch

Non-Rechargeable

T257, T258	4
T259, T263	5
FL1L2AA, FL1L2C	6
FL1L2D, HP7011	7
PT1L2AA, PT1L2D	8

Rechargeable

RS41, RS42	9
RT301, RT302	10
RT308, RT309	11
RT316, RT317	12
RT318, RT393	13

Search Light

Non-Rechargeable

S32, S90C	14
S90, S160	15

Rechargeable

RS947, RS932	16
--------------	----

Work Light

Rechargeable

RS931, RS940	17
RT254	18

Lantern

Non-Rechargeable

S804	18
S235, S245	19

Rechargeable

RS901, RS909	20
RS219, RS243	21

Camping Light

Rechargeable

RS915, RS916	22
RS917A, RS908	23
RS919, RS919S	24

Head Light

Non-Rechargeable

S801, S808	25
------------	----

Rechargeable

RS218, RS903	26
RS920, RT921	27
RS930, RT256	28

Specialty Light

Non-Rechargeable

S35, S66	29
T220, T220L	30

Packing Detail

31



Torch (Non-Rechargeable)



T257

Main Features

- Spot light and flood light in one
- High brightness up to 500 lm
- 3 lighting modes: High / Medium / Low
- Adjustable beam focus for distant observation or wide range illumination.
- Tactical construction with soft anti-slip grip design

Specifications

Power Source: 3 x AAA batteries

Light Source: XHP50B-3V

Lighting Modes: High / Medium / Low

Lumen Output: 500 lm / 250 lm / 50 lm

Beam Distance: 90 m

Run Time: High: 1 h / Medium: 2 h / Low: 15 h

CCT: 5500-7000K

Dimensions(D x H): 34,5 x 135 mm / 1,36 x 9,45 in

Weight: 140 g / 0,31 lb(exclude batteries)



T258

Main Features

- Spot light and flood light in one
- High brightness up to 1000 lm
- Long beam distance up to 150 m
- 3 lighting modes: High / Medium / Low
- Adjustable beam focus for distant observation or wide range illumination.
- Tactical construction with soft anti-slip grip design

Specifications

Power Source: 6 x AAA batteries

Light Source: XHP50B-3V

Lighting Modes: High / Medium / Low

Lumen Output: 1000 lm / 500 lm / 70 lm

Beam Distance: 150 m

Run Time: High: 2 h / Medium: 4.5 h / Low: 12 h

CCT: 5500-7000K

Dimensions(D x H): 36 x 160 mm / 1,42 x 6,3 in

Weight: 170 g / 0,37 lb(exclude batteries)

Torch (Non-Rechargeable)



T259

Main Features

- Spot light and flood light in one
- High brightness up to 2000 lm
- Long beam distance up to 260 m
- 3 lighting modes: High / Medium / Low
- Long operating time up to 18 hours
- Adjustable beam focus for distant observation or wide range illumination
- Tactical construction with soft anti-slip grip design

Specifications

Power Source: 9 x AA batteries

Light Source: XHP50B-6V

Lighting Modes: High / Medium / Low

Lumen Output: 2000 lm / 1000 lm / 200 lm

Beam Distance: 260 m

Run Time: High: 3 h / Medium: 6 h / Low: 18 h

CCT: 5500-7000K

Dimensions(D x H): 52 x 240 mm / 2.05 x 9.45 in

Weight: 400 g / 0.88 lb(exclude cable)



T263

Main Features

- Powerful LED light source
- Super high brightness up to 300 lm
- 5 lighting modes with adjustable beam focus for various lighting needs
- Super long beam distance up to 200 m
- Made of Aircraft aluminum anodized surface
- Portable, anti-slip grip design and attractive appearance

Specifications

Power Source: 3×AAA 1.5V battery

Light Source: 1×XML-T6 10W LED

Lighting Modes:

High / Medium / Low / Strobe / SOS

Lumen Output:

High: 300 lm / Medium: 150 lm / Low: 75 lm

Run Time: High: 3 h / Medium: 6 h / Low: 13 h

CCT: 7000-9000K

Beam Distance: 200 m

Dimensions(D x H): 35×126 mm

Net Weight: 80 g

Torch (Non-Rechargeable)



FL1L2AA

Main Features

- 80% more energy efficient than traditional incandescent flashlights
- Long working time
- Slim & durable

Specifications

Power Source: 2 x AA size batteries

Light Source: 3030 1W LED

Lighting Modes: On / Off

Lumen Output: 100 lm

Run Time: 16 h (approx)

Dimensions(D x H): 36 x 146 mm / 1.42 x 5.75 in

Weight: 40 g / 0.09 lb(without batteries)

Available Colors: Red / Blue / Black / Yellow



FL1L2C

Main Features

- High brightness up to 100 lm
- Long beam distance up to 120 m
- Easy to operate: slide-switch ON / OFF
- Convenient hang-ring

Specifications

Power Source: 2 x C 1.5V batteries

Light Source: 1W LED

Lumen Output: 100 lm

CCT: 6000K-8000K

Beam Distance: 120 m

Dimensions(D x H): 47 x 156 mm / 1.85 x 6.14 in

Weight: 60 g / 0.13 lb (exclude batteries)

Torch (Non-Rechargeable)



FL1L2D

Main Features

- 80% more energy efficient than traditional incandescent flashlights
- Super long working time
- Slim & durable

Specifications

Power Source: 2 x D size batteries

Light Source: 3030 1W LED

Lighting Modes: On / Off

Lumen Output: 100 lm

Beam Distance: 150 m

Run Time: 65 h (approx)

Dimensions(D x H): 60 x 191 mm / 2.36 x 7.52 in

Weight: 100 g / 0.22 lb (without batteries)

Available Colors: Red / Blue / Black / Yellow



HP7011

Main Features

- Durable TPE material
- Shock-resistant of up to 3 meters
- Compact and lightweight
- Weatherproof
- Lanyard included

Specifications

Power Source: 3 x AAA size batteries

Light Source: 1 x Osram 3030 LED

Lighting Modes: On / Off

Lumen Output: 150 lm

Beam Distance: 120 m

Run Time: 5 h (approx)

Dimensions(D x H): 36.5 x 105 mm / 1.44 x 4.13 in

Weight: 54 g / 0.12 lb (without batteries)

Torch (Non-Rechargeable)



PT1L2AA

Main Features

- Durable TPE material
- Shock-resistant of up to 2 meters
- Lanyard included
- IP Rating: IPX7

Specifications

Power Source: 2 x AA size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Lumen Output: 45 lm
Run Time: 20 h (approx)
Dimensions(D x H): 48 x 150 mm / 1.89 x 5.91 in
Weight: 185 g / 0.41 lb (without batteries)
Available Colors: Red / Blue



PT1L2D

Main Features

- Durable TPE material
- Shock-resistant of up to 1 meter
- Lanyard included
- IP Rating: IPX7

Specifications

Power Source: 2 x D size batteries
Light Source: 1W LED
Lighting Modes: On / Off
Lumen Output: 100 lm
Run Time: 100 h (approx)
Dimensions(D x H): 68 x 203 mm / 2.68 x 7.99 in
Weight: 245 g / 0.54 lb (without batteries)
Available Colors: Red / Blue

Torch (Rechargeable)



RS41

Main Features

- Rechargeable & long-lasting – up to 1000 charging circles
- Easy-to-tell charging indicator
- Super bright & long beam distance
- Compact & convenient with slim design

Specifications

Power Source: 3.7V, 1200mAh rechargeable 18650 battery
Light Source: 1W LED
Lumen Output: 80 lm
Beam Distance: 80 m
CCT: 6500K
Charging Time: 6 h
Run Time: 3,5 h
Dimensions(D x H): 55 × 154 mm / 2.17 × 6.06 in
Weight: 120 g / 0.26 lb



RS42

Main Features

- Rechargeable & long-lasting – up to 1000 charging circles
- 2 lighting modes: high beam, low beam
- Easy-to-tell charging indicator
- Higher illumination & ultra-long beam distance
- Compact & convenient with slim design

Specifications

Power Source: 3.7V, 1200mAh rechargeable 18650 battery
Light Source: 1 W LED
CCT: 6500K
Lumen Output: High Beam: 120 lm / Low Beam: 60 lm
Beam Distance: 100 m
Charging Time: 6 h
Run Time: High Beam: 2 h / Low Beam: 4 h
Dimensions(D x H): 62 × 191 mm / 2.44 × 7.52 in
Weight: 170 g / 0.37 lb

Torch(Rechargeable)



USB-C Rechargeable



Adjustable Focus



3 Illuminating Modes



RT301

Main Features


- Ultra-high bright - up to 2000 lm
- 3 lighting modes: High / Medium / Low
- Adjustable beam focus for various lighting needs
- Long operating time up to 16 h
- Tactical construction with soft anti-slip grip design
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V, 2000mAh 18650 Li-ion battery
 Light Source: 34W COB
 Lighting Modes: High / Medium / Low
 Lumen Output: 2000 lm / 1000 lm / 200 lm
 Beam Distance: 80 m
 Run Time: High: 2 h / Medium: 4 h / Low: 16 h
 CCT: 5500-7000K
 Charging Time: 3.5 h(Approx)
 USB-C Input: 5V $\equiv$ 1A
 Dimensions(D x H): 36 x 167mm / 1.42 x 6.57 in
 Weight: 210 g / 0.46 lb(exclude cable)



USB-C Rechargeable



Adjustable Focus



3 Illuminating Modes



RT302

Main Features

- Ultra-high bright - up to 4000 lm
- 3 lighting modes: High / Medium / Low
- Adjustable beam focus for various lighting needs
- Long operating time up to 21 h
- Tactical construction with soft anti-slip grip design
- Rechargeable with USB-C port


Specifications

Power Source: 3.7V, 4000mAh Li-ion battery pack
 Light Source: 76W COB
 Lighting Modes: High / Medium / Low
 Lumen Output: 4000 lm / 2000 lm / 400 lm
 Beam Distance: 100 m
 Run Time: High: 3 h / Medium: 6 h / Low: 21 h
 CCT: 5500-7000K
 Charging Time: 5.5 h(Approx)
 Dimensions(D x H): 36 x 232 mm / 1.42 x 9.13 in
 Weight: 310 g / 0.68 lb(exclude cable)



Torch(Rechargeable)



USB-C Rechargeable



Adjustable Focus

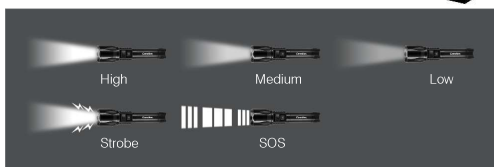


RT308

Main Features

- Powerful LED light source
- Super high brightness up to 600 lm
- 5 lighting modes with adjustable beam focus
- Impressive beam distance up to 550 m
- Durable aluminum alloy construction, resistant to scratches and corrossions
- Digital display for easily monitoring the power levels



Specifications

Power Source: 3.7V 2000mAh 7.4Wh 18650 Li-ion Battery
 Light Source: 1×10W LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Lumen Output: High: 600 lm / Medium: 300 lm / Low: 60 lm
 Run Time: High: 3.5 h / Medium: 6 h / Low: 18 h
 CCT: 7000-8000K
 Beam Distance: 550 m
 Input: USB-C 5V $\equiv$ 1A
 Charging Time: 4 h
 Dimensions (D x H): 40×160 mm / 1.57×6.30 in
 Net Weight: 190 g / 0.42 lb (except USB cable)



Floodlight

Adjustable Focus

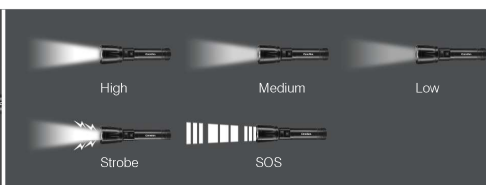

RT309


Main Features

- 20W super powerful white laser LED chip
- 1200-lumen ultra-bright illumination
- Ultra long beam distance up to 800 m
- 5 lighting modes with adjustable beam focus cater
- 5000mAh large capacity extends operating time up to 16 h
- Durable aluminium alloy construction, resistant to scratches and corrossions
- Digital display for easy power level monitoring
- USB-C rechargeable

Specifications

Power Source: 3.7V 5000mAh 18.5Wh 21700 Li-ion Battery
 Light Source: 1×20W White Laser LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Lumen Output: High: 1200 lm / Medium: 600 lm / Low: 100 lm
 Run Time: High: 5 h / Medium: 10 h / Low: 16 h
 CCT: 8000-9000K
 Beam Distance: 800 m
 Input: USB-C 5V $\equiv$ 1A
 Charging Time: 6 h
 Dimensions (D x H): 50×185 mm / 1.97×7.28 in
 Net Weight: 310 g / 0.68 lb

Torch(Rechargeable)

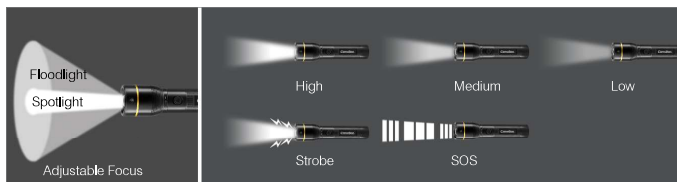

RT316


Main Features

- 30W high-power white LED chip
- 2000 lm ultra-bright illumination
- Long beam distance up to 600 m
- 5 lighting modes with adjustable focus
- Extended runtime up to 16 h
- Power bank function for mobile devices
- Durable aluminum alloy, scratch & corrosion resistant
- USB-C rechargeable

Specifications

Power Source: 3.7V, 5000mAh, 18.5Wh 26650 Li-ion Battery
 Light Source: 1 × 30W White LED Chip
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Lumen Output: High: 2000 lm / Medium: 1000 lm / Low: 100 lm
 Run Time: High: 3 h / Medium: 6 h / Low: 16 h
 CCT: 8000-9000K
 Beam Distance: 600 m
 Charging Time: 4-5 h
 USB-C Input: 5V $\equiv$ 2A
 USB-C Output: 5V $\equiv$ 2A
 Material: Aluminium
 Dimensions (D x H): 43.5 × 170 mm
 Net Weight: 330 g (including battery)

Red	Charging in progress
Green	Fully charged

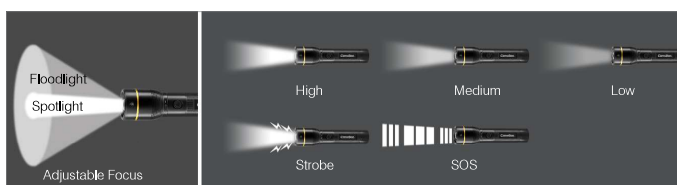

RT317

Main Features

- 15W super powerful white LED chip
- 1000-lumen ultra-bright illumination
- Ultra long beam distance up to 500 m
- 5 lighting modes with adjustable beam focus
- Extended operating time up to 12 h
- Power bank function for mobile devices
- Durable aluminium alloy construction, resistant to scratches and corrossions
- USB-C rechargeable

Specifications

Power Source: 3.7V 2200mAh 8.14Wh 18650 Li-ion Battery
 Light Source: 1 × 10W White LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Luminous Flux: 1000 lm / 500 lm / 100 lm
 CCT: 8000-9000K
 Beam Distance: 500 m
 Run Time: High: 3 h / Medium: 5.5 h / Low: 12 h
 Charging Time: 4 h
 USB-C Input: 5V $\equiv$ 2A
 USB-C Output: 5V $\equiv$ 2A
 Material: Aluminium
 Dimensions (D x H): 35 × 153 mm
 Net Weight: 180 g (including battery)

Torch(Rechargeable)




RT318

Main Features

- 3W high-efficiency white LED chip
- 300-lumen high-bright illumination
- Long beam distance up to 200 m
- 3 lighting modes with adjustable beam focus for different scenarios
- Durable aluminium alloy construction, resistant to scratches and corrosions
- USB-C rechargeable

Specifications

Power Source: 3.7V 1200mAh 4.44Wh 18650 Li-ion Battery
Light Source: 1 × 3W LED
Lighting Modes: High / Low / Strobe
Lumen Output: 300 lm / 150 lm
CCT: 8000-9000K
Beam Distance: 200 m
Run Time: High: 2.5 h / Low: 4.5 h
USB-C Input: 5V $\overline{\text{---}}$ 1A
Charging Time: 2 h
Material: Aluminium +ABS
Dimensions (D x H): 28 × 121 mm
Net Weight: 115 g (including batteries)



Adjustable Focus



5 Illuminating Modes



RT393

Main Features

- USB-C rechargeable with power indicator.
- 1200-lumen 20W LED provides super bright light.
- 5 lighting modes with adjustable focus: 100%, 50%, 25%, Strobe and SOS.
- Made of high quality aircraft aluminum and resistant to scratches, abrasions and corrosion.

Specifications

Power Source: 3.7V, 2000 mAh 18650 Lithium Battery
Light Source: 1 × 20W LED
Lighting Modes: 100% / 50% / 25% / Strobe / SOS
Lumen Output: 1200 lm (max)
Beam Distance: 150 m
Charge Time: 3 h
Run Time: 100%: 2 h, 50%: 4 h, 25%: 8 h
Dimensions (D x H): 42 x 167 mm / 1.65 x 6.57 in
Weight: 235 g / 0.52 lb

Search Light (Non-Rechargeable)



LED Spotlight Modes:



COB Area Lantern Modes:



S32

Main Features

- 2-in-1 multifunction search light
- Five lighting modes including side panel
- Adjustable handle for ease of use in different scenarios
- IPX4 ingress protection

Specifications

Power Source: 3 x AA size batteries

Light Source: 3W White LED + 3W dual-color COB

Lighting Modes: LED: High / Low

COB: White / Red / Red Flashing

Lumen Output: LED: High: 230 lm / Low: 160 lm

COB: White 150 lm

Beam Distance: 200 m

Run Time: LED: High: 4 h / Low: 6 h (approx)

COB: 6 h (approx)

Dimensions (L x W x H):

174 x 98 x 139 mm / 6.85 x 3.86 x 5.47 in

Weight: 325 g / 0.72 lb (without batteries)



S90C

Main Features

- High illumination of up to 260 lumens
- Super durable and long lifespan COB lighting source
- Comes with widely available 4 x AA batteries
- Compact and lightweight design makes it ideal for everyday use

Specifications

Power Source: 4 x AA size batteries

Light Source: 3W COB

Lumen Output: 260 lm

Run Time: 5 h

Dimensions (L x W x H):

146 x 105 x 110 mm / 5.75 x 4.13 x 4.33 in

Weight: 216 g / 0.48 lb

Search Light (Non-Rechargeable)



220
Lumens

100m

3
Lighting
Modes



S90

Main Features

- Light source provided by high bright LED and a COB flood light
- Beam distance of up to 100 meters
- Lightweight and compact
- Durable and comfortable ABS casing
- IP Rating: IPX4

Specifications

Power Source: 4 x AA size batteries

Light Source: 0.5W LED + 3W COB

Lighting Modes: LED / COB / LED+COB

Lumen Output: LED: 90 lm / COB: 150 lm / LED+COB: 220 lm

Beam Distance: 100 m

Run Time: LED: 24 h / COB: 12 h / LED+COB: 6 h (approx)

Dimensions (L x W x H):

147 x 100 x 112 mm / 5.79 x 3.94 x 4.41 in

Weight: 205 g / 0.45 lb(without batteries)



280
Lumens

150m

3
Lighting
Modes

up to
80 hours
continuous
lighting



S160

Main Features

- Light source provided by high bright LED and a COB flood light
- Beam distance of up to 150 meters
- Lightweight and compact
- Durable and comfortable ABS casing
- IP Rating: IPX4

Specifications

Power Source: 4 x D or 1 x 4R25 size batteries

Light Source: 1W LED + 3W COB

Lighting Modes: LED / COB / LED+COB

Lumen Output: LED: 150 lm / COB: 200 lm / LED+COB: 280 lm

Beam Distance: 150 m

Run Time: LED: 80 h COB: 50 h LED+COB: 30 h

Dimensions (L x W x H):

182 x 125 x 138 mm / 7.17 x 4.92 x 5.43 in

Weight: 305 g / 0.45 lb(without batteries)

All data base on using 4D alkaline batteries.

Search Light (Rechargeable)

RS947

Main Features

- 2-in-1 multifunction: Search light and work light
- Built-in rechargeable battery, cost-effective and eco-friendly
- 15W Powerful white laser LED light source
- 4 lighting modes with adjustable beam focus for various lighting needs
- High brightness up to 250 lm
- Lightweight & durable design

Specifications

Power Source: 2 x (18650, 3.7V 1200mAh 4.44Wh), 1S2P Li-ion battery pack

Light Source: 1 x 5050 15W LED + 18 x 0.2W 2835 LED

Lighting Modes:

Search Light: High / Low / Flashing

Work Light: ON/OFF

Lumen Output: 250 lm / 160 lm (Search Light) / 150 lm (Work Light)

Run Time: 2 h / 4 h / 6 h (Search Light High / Low / Work Light)

CCT: LED 9000 -11000K, COB 8000-9000K

Input: (USB-C) 5V $\equiv$ 0.5A

Charging Time: 4.5 h

Dimensions (L x W x H): 202 x 82 x 118 mm

Weight: 315 g



RS932

Main Features

- 4-in-1 multifunction: search light, lantern, table lamp and mobile power
- 3 lighting modes for various scenarios
- High brightness of 250 lm
- Convenient handle for easy carrying
- Super lightweight & practical
- USB-C rechargeable port

Specifications

Power Source: 3.7V 1500mAh 5.55Wh 18650 rechargeable Li-ion battery

Light Source: LED + COB

Lighting Modes: COB Low / COB High / LED

Lumen Output:

COB Low: 150 lm / COB High: 250 lm / LED: 160 lm

Run Time: COB Low: 3 h / COB High: 1.5 h / LED: 2.5 h

CCT : COB: 5000 - 6000K / LED: 6000 - 8000K

Beam Distance: 250 m


Input: USB-C 5V $\equiv$ 0.5A

Charging Time: 4.5 h

Output: USB-A 5V $\equiv$ 0.5A

Dimensions(L x W x H): 155x130x85 mm / 6.10x5.12x3.35 in

Weight: 245 g / 0.66 lb (except USB cable)



Work Light (Rechargeable)



RS931

Main Features

- Multiple lighting modes for various lighting scenarios
- 1000 lm super high brightness
- Super long operating time up to 20 h
- 3 lighting sources, super long life span
- Mobile power bank for emergencies
- Multiple fixing methods suitable for various purposes
 - 360 ° rotatable bracket
 - Strong magnet
 - Tripod standard holding-hole
 - Spring buckle
- USB-C fast recharging port
- Super compact & lightweight

LED Indicator

Red	Charging in progress
Green	Fully Charged

Specifications

Power Source: 3.7V, 3000mAh 11.1Wh 21700 Li-ion battery
 Light Source: COB +2X Filament LED +5X Red SMD
 Lighting Mode: (Main Light) Neutral White / Cool White / Warm White / Red / Stepless Dimming(Excluding red); (Aux Lamp:) Amber / Red SOS
 Lumen Output:(Main Light) Neutral White: 1000 lm; Cool White: 650 lm; Warm White:600 lm; (Aux Lamp:) Amber: 50lm
 CCT: (Main Light): 3200K - 6000K
 Run Time: Main Light: Neutral White: 4h ; Warm White / Cool White: 6h
 Aux Lamp: Filament LED: 20h
 Charging Time: 4.5h
 Input (USB-C): 5V $\equiv$ 1A
 Output (USB-A): 5V $\equiv$ 1A
 Dimensions (L x W x H): 93 x 30 x 98 mm
 Net Weight: 190 g




RS940

Main Features

- 2-in-1 multifunction: torch and work light
- 6 lighting modes for various lighting scenarios
- 150 lm high brightness
- Digital display for easy power level monitoring
- Pen shape & size, perfect fit in hands
- USB-C rechargeable

Specifications

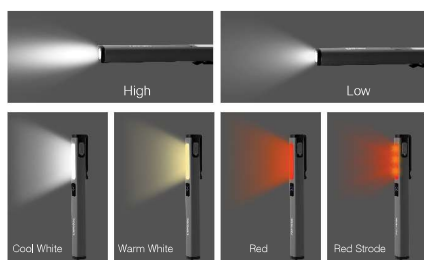

	Torch	Work Light
Light Source	1 x XTE LED	5 x White SMD + 2 x Warm SMD + 2 x Red SMD
Lighting Mode	High / Low	Cool White / Warm White / Red / Red strobe
Lumen Output	High:150 lm / Low: 50 lm	Cool White / Warm White: 40 lm
Run Time	High: 2 h / Low: 4.5 h	Cool White / Warm White: 1.5 h
CCT	6500K - 7000K	Cool White: 6500K - 7000K / Warm White: 2800K - 3200K
Power Source: 1 x 3.7V 400mAh 1.48Wh Li-ion rechargeable battery Beam Distance: 25 m USB-C Input: 5V $\equiv$ 0.5A Charging Time: 1 h Dimensions (L x W x H): 22 x 18 x 176 mm / 0.87 x 0.71 x 6.93 in Weight: 45 g / 0.10 lb		

Work Light (Rechargeable)

RT254

Main Features

- 4-in-1 multifunctional
Mini work light, keychain light, bottle opener and screwdriver in one
- 7 lighting modes
- Ultra-high brightness up to 420 lm
- Powerful wide-angle illumination
- Hands-free operation
- Super compact and lightweight
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V, 500mAh rechargeable Li-polymer battery

Light Source: COB (White: 5W + Amber: 3W + Red: 0.5W)

Lighting Modes: Cool White High / Cool White Low / Neutral White High / Neutral White Low / Red / Red Flashing / Cool White + Neutral White

Lumen Output:

Cool White High: 200 lm / Cool White Low: 65 lm / Neutral White High: 220 lm / Neutral White Low: 70 lm / Cool White + Neutral White: 420 lm

Run Time: Cool White High: 2.5 h / Cool White Low: 3.5 h /

Neutral White High: 2 h / Neutral White Low: 2.5 h /

Cool White + Neutral White: 1.5 h

CCT: Cool White: 7000-8000K / Neutral White: 4000-5000K /

Cool White + Neutral White: 5000-6000K

Charging Time: 1.5 h (Approx.)

Beam Distance: 30 m



Lantern (Non-Rechargeable)

S804

Main Features

- 2-in-1 multifunction: camping lantern & flashlight
- 100 lumens high brightness
- Powered by AA batteries for easy replacement
- Long runtime: up to 40 hours
- 3 lighting modes for various scenarios
- Elegant design, lightweight and easy to carry

Specifications

Power Source: 3 x AA 1.5V battery

Lighting Source: 1 x XPE LED + 8 x 2835 LED (Cool White) + 4 x 2835 LED (Warm White)

Lighting Modes: Spotlight / Floodlight / Lantern

Lumen Output: 100 lm / 75 lm / 75 lm

Run Time: 25 h (Spotlight) / 40 h (Floodlight) / 40 h (Lantern)

CCT: 8000-9000K (Spotlight) / 6000-7000K (Floodlight) / 3000-4000K (Lantern)

Beam Distance: 50 m

Material: ABS

Product Dimensions (L x W x H): 46 x 46 x 130 mm

Product Weight: 78 g



Lantern (Non-Rechargeable)





S235

Main Features

- Effective 360° Lighting and 5%~100% Stepless Dimmer
- 3 Lighting Modes: Warm White / Daylight / Neutral White
- Ultra-high Illumination: Up to 1200 lm
- Longer Lighting Duration: Up to 41h Continuous Lighting
- Convenient Handle and Hook for Carrying or Hanging

Specifications

Lighting Modes	Warm White	Daylight	Neutral White
Lumen Output	450 lm	900 lm	1200 lm
Run Time	41 h	18 h	12.5 h
CCT	3700K-4200K	6000K-7000K	/
Power Source: 3 x D batteries Lighting Source: 4X SMD Yellow + 42X SMD White Dimensions(L x D x H): 99 x 93 x 188 mm / 3.90 x 3.66 x 7.40 in Net Weight: 385 g / 0.85 lb(Exclude Battery)			



S245

Main Features

- 2 lighting modes: High / Low
- High illumination of 260 lm
- Effective 360° lighting
- Convenient hook for easy carrying or hanging

Specifications

Power Source: 3 x AA batteries
 Lighting Source: 3 x 1W COB
 Lighting Modes: High / Low
 Lumen Output: High: 260 lm / Low: 70 lm
 Run Time: High: 6 h / Low: 22 h
 CCT: 3000K-4000K
 Dimensions(D x H): 116 x 178 mm / 4.57 x 7.01 in
 Net Weight: 200 g / 0.44 lb (exclude batteries)

Lantern (Rechargeable)

RS901

Main Features

- High illumination of 370 lm
- 2 lighting modes for 360° cozy ambience
- Convenient hook for easy carrying or hanging
- Rechargeable via a USB-C port
- LED power indicator



Specifications

Power Source: 3.7V, 1200mAh Lithium Battery

Lighting Source: 12 x 0.5W SMD

Lighting Mode: High / Low

Lumen Output: High: 370 lm / Low: 100 lm

Run Time: High: 2.5 h / Low: 4.5 h (Approx.)

CCT: 2700K-3700K

Charging Time: 2.5 h (Approx.)

Input: USB-C 5V $\equiv$ 0.5A

Dimensions(D x H): 81 x 99 mm / 3.19 x 3.9 in

Net Weight: 120 g / 0.26 lb(exclude cable)

RS909

Main Features

- High brightness up to 100 lm
- Quick recharge via a USB-C input port
- High-efficiency solar panel for free power from the sun outdoors
- 3 soft lighting modes creating a cozy ambience
- Stepless dimming switch allows easy adjustment of lighting modes / brightness
- Convenient handle for easy use



Specifications

Power Source: 3.7V 1200mAh 18650 rechargeable battery

Light Source: Amber LED + Neutral White LED

Switch: Rotary Switch

Lighting Modes: Amber / Neutral White / Warm White

Lumen Output: 100 lm

Run Time: $\geq$ 3 h

Charging Input: USB-C 5V $\equiv$ 0.5A / Solar Panel: 5V $\equiv$ 70mA Max.

Charging Time: USB-C Input: 2 h

Dimensions(D x H): 108 x 138 mm / 4.25 x 5.43 in

Weight: 205 g / 0.45 lb (include battery)

Lantern (Rechargeable)




RS219

Main Features

- Effective 360° Lighting and 5%~100% Stepless Dimmer
- 3 Lighting Modes: Warm White / Daylight / Neutral White
- Ultra-high Illumination: Up to 1400 lm
- Convenient Handle and Hook for Carrying or Hanging
- Power Bank for Emergency

Specifications

Lighting Modes	Warm White	Daylight	Neutral White
Lumen Output	350 lm	1100 lm	1400 lm
Run Time	22 h	5 h	4.5 h
CCT	3700K-4200K	6000K-7000K	/
Power Source: 3.7V 4400mAh Lithium Battery Pack Lighting Source: 4X SMD Yellow + 42X SMD White Input: USB-C 5V $\overline{=}$ 1A Output: USB A 5V $\overline{=}$ 1A Charging Time: 8 h (Approx.) Dimensions (L x D x H): 99 x 93 x 188 mm / 3.90 x 3.66 x 7.40 in Net Weight: 490 g / 1.08 lb (Exclude Cable)			

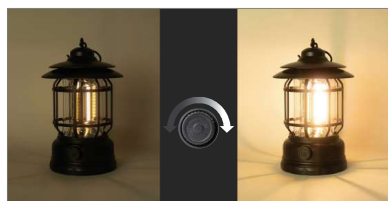

RS243

Main Features

- High illumination of 200 lm
- Effective 360° lighting
- Stepless dimmer meets different lighting needs
- Convenient hook for easy carrying or hanging
- Rechargeable via USB-C port

Specifications

Power Source: 3.7V, 800mAh 18650 Lithium Rechargeable Battery
 Lighting Source: 3 x 1W COB
 Lighting Mode: Stepless Dimmer
 Lumen Output: 200 lm (Max)
 CCT: 5000K-7000K
 Run Time: 1.5-6.5 h (Approx.)
 Input: USB-C 5V $\overline{=}$ 0.5A
 Charging Time: 2 h (Approx.)
 Dimensions (D x H): 116 x 184 mm / 4.57 x 7.24 in
 Net Weight: 240 g / 0.53 lb (Exclude Cable)

Camping String Light (Rechargeable)



RS915

Main Features

- Multifunction as camping light and string light
- High brightness up to 400 lm
- 6 basic lighting modes & SMD+LED free-combined modes
- 10-meter retractable LED string light
- Hidden hanging ring for easy carrying, hanging & retracting string light
- USB-C port input
- Compact & easy storage

Specifications

Power Source: Power Source: 3.7V, 1800mAh 6.66Wh rechargeable Li-ion battery

Light Source: 36×SMD+100×LED

String Light: 10 m, Warm White

Lighting Modes:

Camping Light: White High / White Low / Red Flashing

String Light: Solid-on / Flashing / Breathing

Lumen Output:

Camping Light: White High: 400 lm / White Low: 200 lm

Run Time:

Camping Light: White High: 3 h / White Low: 5 h /

String Light: Solid-on: 4.5 h

USB-C Input: 5V = 1A

Charging Time: 2.5 h

Dimensions(D x H): 119×41 mm / 4.69×1.61 in

Net Weight: 230 g / 0.51 lb



RS916

Main Features

- Multifunction as camping light and string light
- High brightness up to 400 lm
- 6 basic lighting modes & SMD+LED free-combined modes
- 10-meter retractable LED string light
- Hidden hanging ring for easy carrying, hanging & retracting string light
- USB-C port input
- Compact & easy storage

Specifications

Power Source: 3.7V, 1800mAh 6.66Wh rechargeable Li-ion battery

Light Source: 36×SMD+100×LED (25×Red+25×Yellow+25×Blue+25×Green)

String Light: 10 m, Colourful

Lighting Modes:

Camping Light: White High / White Low / Red Flashing

String Light: Solid-on / Flashing / Breathing

Lumen Output:

Camping Light: White High: 400 lm / White Low: 200 lm

Run Time:

Camping Light: White High: 3 h / White Low: 5 h /

String Light: Solid-on: 4.5 h

USB-C Input: 5V = 1A

Charging Time: 2.5 h

Dimensions(D x H): 119×41 mm / 4.69×1.61 in

Net Weight: 230 g / 0.51 lb

Camping Light (Rechargeable)



RS917A

Main Features

- Energy-efficient LED filament, extended lifespan
- Brilliant illumination up to 250 lumens
- Versatile lighting modes for every occasion
- Convenient USB-C charging port
- Practical hanging hook, ideal for illumination anywhere

Specifications

Power Source: 3.7V 400mAh 14500 Li-ion battery

Light Source: 2×Filament LED

Lighting Modes: High / Medium / Low

Lumen Output: High: 250 lm / Medium: 120 lm / Low: 75 lm

Run Time: High: 1.5 h / Medium: 2.5 h / Low: 5 h

CCT: 2500-3000K

Input: USB-C 5V $\overline{\text{---}}$ 0.5A

Charging Time: 1.5 h

Dimensions(D x H): 62×175 mm / 2.44×6.89 in

Weight: 55 g / 0.12 lb (including battery)

RS908

Main Features

- 2-in-1 multifunction: flashlight, camping light
- 6 lighting modes for various scenarios
- High brightness up to 200 lm
- Spring hook for easy hanging
- Ultra compact & lightweight

Specifications

Flashlight:

Light Source: 1 x 5W XTE LED

Lighting Modes: White High / White Low

Lumen Output: White High: 200 lm / White Low: 100 lm

Run Time: White High: 3.5h / White Low: 4.5 h

CCT: 6000-7000K

Camping Light:

Light Source: 18 SMD(12 x White + 4 x Amber + 2 x Red)

Lighting Modes: White / Amber / Red / Red Flashing

Lumen Output: White: 40 lm / Amber: 40 lm

Run Time: White: 3 h / Amber: 7 h

CCT: White: 6500-7500K / Amber: 1500-2000K

Power Source:

3.7V 1200mAh 4.44Wh 18650 Li-ion battery


Beam Distance: 35 m

Input: USB-C 5V $\overline{\text{---}}$ 0.5A


Charging Time: 3 h

Dimensions (D x H): 37 x 128 mm / 1.46 x 5.04 in

Net Weight: 95 g / 0.21 lb

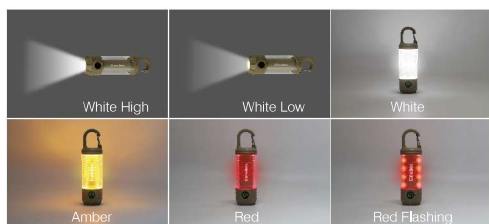

Camping Light (Rechargeable)



RS919

Main Features

- High brightness of 250 lm
- 2 brightness levels cater to different lighting needs
- Convenient USB-C charging port
- Practical hanging hook, ideal for illumination anywhere

Specifications

Power Source:
3.7V 1200mAh 18650 Rechargeable Battery
Light Source: 2×Filament LED
Lighting Modes: High / Low
Lumen Output: High: 250 lm / Low: 75 lm
RunTime: High: 5.5 h / Low: 8.5 h
CCT: 2500-3000K
Input: USB-C 5V $\equiv$ 1A
Charging Time: 2.5 h
Dimensions(D x H): 180×110 mm / 7.09×4.33 in
Weight: 175 g / 0.39 lb (including battery)



RS919S

Main Features

- High illumination of 250 lm
- 2 soft lighting modes creating a cozy ambiance
- Recharge via a USB-C input port
- High-efficient solar panel for free power from the sunshine
- Convenient hook for easy carrying or hanging

Specifications

Power Source:
3.7V 1200mAh 18650 Rechargeable Battery
Light Source: 2×0.45W Filament LED
Switch: Button Switch
Lighting Modes: High / Low
Lumen Output: High: 250 lm / Low: 75 lm
Run Time: High: 4.5 h / Low: 8 h
CCT : 2500 - 3000K
Input: USB-C 5V $\equiv$ 1A / Solar Panel: 5V $\equiv$ 40mA
Charging Time: 2.5 h
Dimensions(D x H): 180×110 mm / 7.09×4.33 in
Weight: 185 g / 0.41 lb (including battery)

Head Light (Non-Rechargeable)

S801

Main Features

- 4 lighting modes meet different lighting needs
- High brightness up to 120 lm
- 45° adjustable light angle
- Durable & lightweight
- Easy-to-use

Specifications

Power Source: 3 x AAA size batteries

Lighting Source: 2W White LED + Red LED

Lighting Modes:

White High / White Low / Red / Red Flashing

Lumen Output: White High: 120 lm / White Low: 40 lm

Run Time: White High: 3 h / White Low: 10 h

CCT: 7000K

Dimensions(L x W x H):

61x 46 x 35 mm / 2.40 x 1.81 x 1.38 in

Net Weight: 51 g / 0.11 lb



S808

Main Features

- Super bright COB lighting
- Easy-to-use switch
- 4 lighting modes
- Adjustable light angle

Specifications

Power Source: 3 x AAA size batteries

Light Source: 1 x 3W COB LED

Lighting Modes: High / Low / Strobe / SOS

Lumen Output: High: 120 lm / Low: 30 lm

Run time: High: 2 h / Low: 8 h (approx)

Dimensions(L x W x H):

60 x 45 x 35 mm / 2.36 x 1.77 x 1.38 in

Weight: 15 g / 0.09 lb(without batteries)

Head Light (Rechargeable)



RS218

Main Features

- 3W high power LED and 10W dual color COB
- Wave sensor with sensing distance of 10 cm
- Easy-to-use switch
- Six lighting modes: COB White High, COB White Low, LED, COB Red, COB Red Strobe, (COB + LED) White Strobe

Specifications

Power Source:

3.7V, 800mAh rechargeable Li-polymer battery

Light Source: 3W LED + 10W COB

Lumen Output:

COB White High: 320 lm / COB White Low: 160 lm / LED: 150 lm

Run Time: COB White High: 1.7 h /

COB White Low: 2.1 h / LED: 3.5 h

Beam Distance: 50 m

Charging Time: 2.5 h

Dimensions (L x W x H):

285 x 32 x 25 mm / 11.22 x 1.26 x 0.98 in

Weight: 60 g / 0.15 lb



RS903

Main Features

- Wave sensor controllable within 10 cm
- 5 lighting modes for various lighting scenarios
- 2 lighting switches – manual button + wave sensor
- 90°adjustable light angle
- Rechargeable via USB-C port

Specifications

Power Source: 3.7V, 500mAh Li-polymer Battery

Lighting Source: 1W White LED + 0.2W Red LED

Lighting Mode:

White Low / White Medium / White High / Red / Red Flashing

Lumen Output:

White Low: 20 lm/ White Medium: 40 lm / White High: 85 lm

Beam Distance: 20 m

Run Time: High:

White Low: 16 h/ White Medium: 9 h / White High: 6 h

CCT: 6000K-7000K

Sensor Distance: 10 cm

Charging Time: 2 h (Approx.)

Dimensions (L x W x H): 70 x 35 x 32 mm / 2.76 x 1.38 x 1.26 in

Net Weight: 60 g / 0.13 lb(exclude cable)

Head Light (Rechargeable)

RS920

Main Features

- Wave sensor controllable within 10 cm
- High brightness up to 300 lm
- 6 lighting modes for various lighting scenarios
- Dual switch: manual switch + sensor switch
- 90° adjustable light angle

Specifications

Power Source: 3.7V 800mAh 2.96Wh Li-polymer battery

Light Source: 2 × XPG LED + 4 × Red SMD

Lighting Modes: Cool White / Warm White / Cool White + Warm White / Red / Red Flashing / Turbo

Lumen Output: Cool White: 140 lm / Warm White: 130 lm / Cool White + Warm White: 160 lm / Turbo: 300 lm

Run Time:

Cool White: 4 h / Warm White: 4 h / Cool White + Warm White: 3.5 h

CCT : Cool White: 6000~7000K /

Warm White: 2500 - 3500K / Cool White + Warm White: 4500 - 5500K /

Turbo: 4500 - 5500K


Beam Distance: 50 m

Input: 5V $\equiv$ 0.5A

Charge Time: 2 h

Dimensions(L × W × H): 52 × 34 × 30 mm / 2.05 × 1.34 × 1.18 in

Weight: 57 g / 0.13 lb (except USB cable)

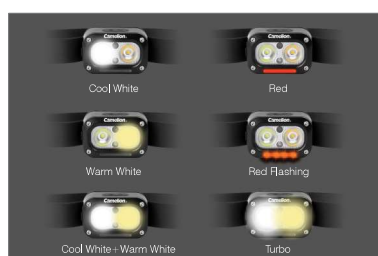

RS921

Main Features

- Wave sensor controllable within 10 cm
- High brightness up to 480 lm
- 3 lighting modes for various lighting scenarios
- Stepless dimming allows easy adjustment of light brightness
- Dual switch: manual switch + sensor switch
- 60° adjustable light angle

Specifications

Power Source: 3.7V 1800mAh 6.66Wh 103450 Li-polymer battery

Light Source: 1 × 6W LED + 1 × 3W COB

Lighting Modes: LED / COB / LED + COB

Lumen Output:

LED: 280 lm / COB: 300 lm / LED + COB: 480 lm

Run Time: LED: 5 h / COB: 5 h / LED + COB: 2.5 h

CCT: 6000-7000K

Input: (USB-C)5V $\equiv$ 1A




Charging Time: 3 h

Adjustable Angle: 60°

Material: ABS

Dimensions(L x W x H): 78 × 45 × 50 mm

Net Weight: 125 g (including headband)

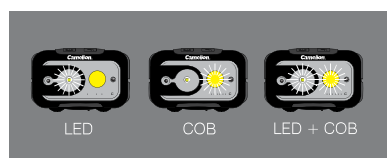

Head Light (Rechargeable)



RS930

Main Features

- Wave sensor controllable within 10 cm
- 6 lighting modes for various lighting scenarios
- Dual lighting sources, super long life span
- Silicone headband, comfortable wearing

LED Indicator

Red	Charging in progress
Green	Fully Charged

Specifications

Power Source: 3.7V, 800mAh 2,96Wh 14500 Li-ion battery

Light Source: 1W White LED + 2 x 0.15W Red + 2 x 0.5W White COB

Lighting Mode: LED High / LED Low / LED High + COB / COB / Red / SOS

Lumen Output: LED High: 80 lm; LED Low: 30 lm; LED High + COB: 130 lm; COB: 70 lm

CCT: 5500K - 6500K

Run Time: LED High: 3.5 h / LED Low: 8 h / COB: 6.5 h

Charging Time: 3 h

Input (USB-C): 5V $\overline{\text{---}}$ 0.5A

Dimensions (L x H): 200 x 36 mm

Net Weight: 60 g

RT256



Main Features

- Dual independent lighting systems
- Ultra-high brightness up to 280 lm
- Multifunction as head light / lantern / work light
- 7 basic lighting modes & LED+COB free-combined modes
- Soft light with a frosted cap (removable)
- 60° adjustable light angle
- Integrated hook & clip & magnetic base

Specifications

Power Source: 3.7V, 500mAh Li-Polymer Battery

Light Source: 5W LED + 3W COB

Lighting Modes: LED White High / LED White Low / LED White Flashing / COB White High / COB White Low / COB Red / COB Red Flashing

Lumen Output: 280 lm

CCT: 6000-7000K

Run Time :

LED White High + COB White High: 1 h /

LED White High: 1.5 h / LED White Low: 3.5 h /

COB White High: 2 h / COB White Low: 3.5 h

Beam Distance: 60 m

Charging Time: 1 h (Approx.)

Dimensions: 41 x 45 x 54 mm / 3.86 x 1.22 x 1.30 in

Weight: 70 g / 0.15 lb(exclude charging cable)



Specialty Light (Non-Rechargeable)



S35

Main Features

- Adjustable brightness with rotary dial
- Easy mount with variations of nail hole, velcro or magnet
- Great lighting provided by 2 x 3W COB LEDs

Specifications

Power Source: 4 x AAA size batteries
Light Source: 2 x 3W COB LEDs
Lighting Modes: On / Off
(adjustable brightness with rotary dial)
Lumen Output: 250 lm
Run Time: Brightest: 2.5 h
Dimensions(L x W x H):
114 x 76 x 31 mm / 4.49 x 2.99 x 1.22 in
Weight: 72 g / 0.16 lb(without batteries)



S66


Main Features

- Small and compact
- Equipped with detachable base
- Sensor distance up to 4 meters
- 20 lm soft down light

Specifications

Power Source: 3 x AAA size batteries
Light Source: 2 x SMD2835
Lumen Output: 20 lm
Sensor Distance: 4 meters
Dimensions(L x W x H):
120 x 45 x 30 mm / 4.72 x 1.77 x 1.18 in
Weight: 56 g / 0.12 lb

Specialty Light (Non-Rechargeable)



T220

Main Features

- Stainless steel material
- Cute pocket clip for easy attachment
- Perfect size to fit in hands and applied easily
- Equipped with special vacuum bulb for medical diagnosis on eyes, ears and noses, etc.

Specifications

Power Source: 2 x AAA batteries

LightSource: 1 X 2.2V 250mA Vacuum bulb

Lumen Output: 5 lm

Run Time: 3 h

Dimensions(D x L): 13×140 mm / 0.51×5.51 in

Weight: 25 g / 0.06 lb (exclude batteries)

T220L

Main Features

- Elegant look & nice feel in hand with durable stainless steel body
- Convenient pocket clip
- Perfect size to fit in hands
- Easy to operate: one-button ON / OFF
- Used for medical diagnosis of ears, mouth, noses, etc

Specifications

Power Source: 2×AAA batteries


Light Source: LED

Lumen Output: 10 lm

CCT: 6000K-8000K

Dimensions(D x L): 13×140 mm / 0.51×5.51 in

Weight: 25 g / 0.06 lb (exclude batteries)



Packing Detail

Model#	Item#	Packaging Details								
		Packaging Type	Batteries Included	Blister/Display Details		Outer Carton Details				
				Dimensions (mm)	Net Weight(g)	Packs/ Carton	Dimensions (cm)	Volume (M³)	Gross Weight (Kg)	Net Weight (kg)
				L x W x D			L x W x H			
T257	T257-3LR03-D12	Display Box	3LR03	182 × 140 × 140	/	48	38 × 29.5 × 16	0.0179	8.7	8.4
T258	/	/	/	/	/	/	/	/	/	/
T259	/	/	/	/	/	/	/	/	/	/
T263	T263-CBH	Box	/	76 × 40 × 215	/	60	45 × 40 × 28	0.0504	7.4	9.1
FL1L2AA	FL1L2AA2R6P	Blister Pack	2R6P	99 × 211 × 38	88	60	40 × 30 × 23	0.0276	5.7	5.3
	FL1L2AAD24	Display Box	/	230 × 154 × 150	1116	8	48 × 33 × 32.5	0.0515	9.29	8.2
FL1L2C	FL1L2C2R14P	Blister Pack	2R14P	131 × 24 × 50	170	24	47 × 26 × 20	0.0224	5	4
FL1L2D	FL1L2DR20P	Blister Pack	2R20P	158 × 292 × 64	313	24	46 × 31.5 × 31	0.0449	8.7	7.5
	FL1L2DD12	Display Box	/	250 × 188 × 195	1332	4	51.5 × 40 × 21.5	0.0443	6.75	5.3
HP7011	HP7011-BP	Blister Pack	/	110 × 190 × 40	74	48	46.5 × 41.5 × 21.5	0.0415	4.8	3.7
	HP7011-3R03BP	Blister Pack	3R03P	110 × 190 × 40	96.5	48	51.5 × 21.5 × 26.5	0.0294	6.4	4.7
	HP7011-3R03PD24	Display Box	3R03P	318 × 216 × 115	2036	4	46 × 34 × 25	0.0391	9.3	8.2
	HP7011D24	Display Box	/	318 × 216 × 115	1496	4	46 × 34 × 25	0.0391	7.1	6
PT1L2AA	PT1L2AABP	Blister Pack	/	248 × 120 × 50	131	48	49.5 × 36 × 33	0.0588	7.3	6.3
	PT1L2AA-2R6PBP	Blister Pack	2R6P	248 × 120 × 50	161	48	49.5 × 36 × 33	0.0588	8.7	7.7
PT1L2D	PT1L2DBP	Blister Pack	/	305 × 175 × 70	279	24	50.5 × 45 × 33	0.075	7.7	6.7
	PT1L2D-2R20PBP	Blister Pack	2R20P	305 × 175 × 70	446	24	50.5 × 45 × 33	0.075	11.7	10.7
RS41	RS41-CB	Box	Li-ion 18650	156 × 58 × 58	170	48	36.5 × 32.8 × 25.2	0.0302	8.51	8.16
RS42	RS42-CB	Box	Li-ion 18650	193 × 63 × 63	198	48	40.2 × 39.5 × 27.2	0.0432	9.85	9.5
RT301	RT301-TB	Blister Pack	18650	110 x 255 x 37	210	24	39.5 x 24.5 x 20	0.0247	6.7	7.4
RT302	RT302-CBH	Box	18650	118 x 42 x 302	310	24	55.5 x 27.5 x 28	0.0427	10.1	10.6
RT308	RT308-CBH	Box	/	75 x 46x 215	/	40	51 x 40.5 x 20	0.0413	9.3	9.9
RT309	/	/	/	/	/	/	/	/	/	/
RT316	RT316-CBH	Box	Li-ion 26650	71 x 50 x 175	/	40	38 × 37 × 35	0.0492	13.5	12.5
RT317	RT317-CBH	Box	Li-ion 18650	67 x 40 x 170		40	36.5 × 36 × 31	0.0407	12.5	11.5
RT318	RT318-CBH	Box	Li-ion 18650	37 x 37 x 13		40	51 x 40.5 x 20	0.0204	8	7
RT393	RT393-TB	Blister Pack	18650	110 × 255 × 43	278	48	28 × 27 × 27	0.053	14.6	13.5
S32	S32-3R6PCB	Box	3R6P	185 × 105 × 148	390	6	39 × 33.5 × 17	0.0222	3.15	2.35
S90C	S90C-4R6P-CB	BOX	4R6P	146 x 105 x 110	216	24	47.5 x 44 x 27.3	0.0571	8.8	8.2
S90	S90-4R6P-CB	Box	4R6P	105 × 150 × 118	330	24	43.5 × 31.5 × 37.5	0.0514	8.4	7.9
S160	S160-CB	Box	/	250 × 123 × 135	1042	12	52 × 39 × 30	0.0609	13.1	12.5
	S160-4R25SP	Shrink Pack	4R25	250 × 120 × 132	1042	12	51 × 37 × 28	0.0528	13.1	12.5
RS947	/	/	/	/	/	/	/	/	/	/
RS932	RS932-CB	Box	/	165 × 90 × 135	/	40	57 × 48.5 × 37	0.1023	12.8	14.6
RS931	/	/	/	/	/	/	/	/	/	/
RS940	/	/	/	/	/	/	/	/	/	/
RT254	/	/	/	/	/	/	/	/	/	/
S804	/	/	/	/	/	/	/	/	/	/
S235	S235-CB	Box	/	100 × 100 × 200	385	20	53 × 23 × 45	0.0549	10.6	9.5
S245	S245-3R6P-CB	Box	3R6P	120 × 120 × 185	/	32	52.5 × 51 × 40.5	0.1084	11.8	10.8
RS901	RS901-CB	Box	/	/	/	100	45.5 × 45 × 44.5	0.0911	13.5	/
RS909	/	/	/	/	/	/	/	/	/	/
RS219	RS219-CB	Box	/	100 × 100 × 200	/	20	53 × 23 × 45	0.0549	12.5	11.5
RS243	RS243-CB	Box	/	120 × 120 × 191	/	32	50.5 × 50.5 × 41	0.1046	11	10.5
RS915	RS915-CBH	Box	/	53.5 × 27.5 × 13.5	280	40	55.5 × 29 × 28	0.0451	12	11.2
RS916	RS916-CBH	Box	/	53.5 × 27.5 × 13.5	280	40	55.5 × 29 × 29	0.0467	12	11.2
RS917A	RS917A-CB	Box	/	66 × 66 × 180	/	60	42 × 38.5 × 42.5	0.0687	5.6	7.6
RS908	/	/	/	/	/	/	/	/	/	/
RS919	RS919-CB	Box	/	182 × 120 × 145	/	30	64 × 39 × 52	0.1298	9.8	10.8
RS919S	RS919S-CB	Box	/	182 × 120 × 145	/	40	64 × 39 × 63	0.1572	13	14
S58	S58-3LR03DB	Blister Pack	3LR03	128 × 178 × 67	99.5	48	55 × 43.5 × 30.5	0.073	5.7	4.78
S801	S801-3LR03-CBH	Box	3LR03	110 × 33 × 215	/	48	35.5 × 33 × 39.5	0.0463	5.6	5.0
RS218	RS218-CBH	Box	/	85 × 37 × 192	/	48	52.0 x 36.0 x 20.0	0.0374	6.0	4.5
RS903	RS903-CBH	Box	/	85 × 40 × 190	/	48	54.5 × 35.5 × 21	0.0406	6.0	5.3
RS920	RS920-CBH	Box	/	85 × 40 × 190	/	60	43.5 x 35.5 x 32	0.0494	6.8	5.8
RS921	RS921-CBH	Box	Li-ion 103450	130 x 50 x 135	125	40	56.0 x 31.5 x 31.0	0.0547	8.0	9.0
RS930	/	/	/	/	/	/	/	/	/	/
RT256	RT256-CBH	Box	/	85 × 44 × 192	/	48	60 × 36.5 × 21	0.0460	7.4	6.0
S35	S35-4R03PD12	Display Box	4R03P	280 × 195 × 118	1785	4	40.5 × 29.5 × 25.6	0.0306	6.5	5
S66	S66-3LR03TB	Blister Pack	3LR03	125 × 200 × 30	100	48	42.5 × 31 × 29.5	0.0389	5.82	4.8
T220	T220-2R03P-DB	Blister Pack	2R03P	114 × 229 × 18	70	100	48× 40 × 25	0.0480	8.3	7
T220L	T220L-2R03P-DB	Blister Pack	2R03P	114 × 229 × 18	70	100	48× 40 × 25	0.0480	8.3	7

Empower Every Possibility with More Energy Solutions

Camelion has been providing energy solutions to customers worldwide for over 29 years. As one of the most influential energy solution brands in the global market, Camelion is now actively operating in over 120 countries and regions in collaboration with our business partners. Our mission is to satisfy our customers with the finest quality products, customer-friendly price and thoughtful services. Whenever and wherever you are in need, we are always ready for your help with all the energy solutions you need.



Camelion Battery Co., Ltd.

Unit 705, Cyber Times Tower A, Tianan Cyber Park,
Futian, Shenzhen, Guangdong, China

Camelion Enterprises Ltd.

Block 8, 3/F, Sunray Industrial Centre,
610 Cha Kwo Ling Road , Kowloon, Hong Kong

For more information about Camelion, please visit www.camelionbattery.com

Camelion is a registered trademark of Camelion Battery Co., Ltd.
All other brand names are trademarks or registered trademarks of the respective companies.
Copyright ©2026 Camelion Battery Co., Ltd. All rights reserved.



www.camelionbattery.com

CA-FL-2026